
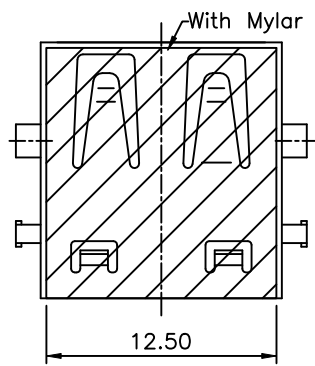
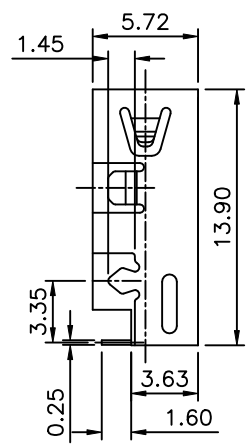


SPECIFICATION

Current:1.5A Max.
 Voltage:30mV Max.
 Withstanding Voltage:500V AC
 Contact Resistance:30 Milliohms Max. Initial
 Insulation Resistance:1000 Megaohms Min.
 Mating Force:35N Max.
 Withstanding Force:10N Min.
 Durability:5000 Cycles Min.
 Shell:SUS301 1/4H,Nickel Plated Over All
 Contacts:Phosphor Bronze
 Insulator:LCP+30%G.F.(UL94V-0),Black
 Temperature Range:-55°C~+85°C
 RoHS Compliant

Recommended P.C.B. Layout(Component Side)
 (PCB Board Tolerance±0.05)Thickness:1.20mm

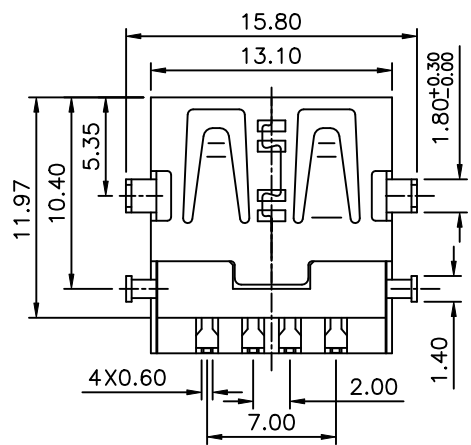

- USB D 13 - 1X04 S R C - R - 4 - X - R3H5 - H H
- | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) | (11) | (12) | (13) |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
- (1) USB:USB Series
 - (2) D:Dent Type
 - (3) 13:Length=13.9mm
 - (4) 1X04:A Type
 - (5) S:Female
 - (6) R:DIP Right Angle
 - (7) C:With Mylar
 - (8) R:Reverse Type
 - (9) 4:4 Shell Tabs:DIP
 - (10) X:Contact Finish
 - 1:Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
 - 3:Gold Plated 15u" On Contact Area,Tin Plated On Solder Tails,Over Nickel
 - 6:Gold Plated 30u" On Contact Area,Tin Plated On Solder Tails,Over Nickel
 - (11) R3H5:Tape & Reel 350 PCS/Reel
 - (12) H:Withstand High Temperature Soldering
 - (13) H:RoHS Compliant



CATEGORY		APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X* ±2* .XX ±0.25 .XX* ±1* .XXX ±0.15				
PART No. USB D13-1X04SRC-R-4-X-R3H5-HH		MEI					
DRAWING No. USB D13-1X04SRC-R-4-X-R3H5-HH		CHECKED BY HZF					
		DRAWING BY CYP					
SCALE	NONE	REV.	A0	UNIT mm	NO. REV.	A0	NEW RELEASE
							REVISIONS
							CHK
							DATE