
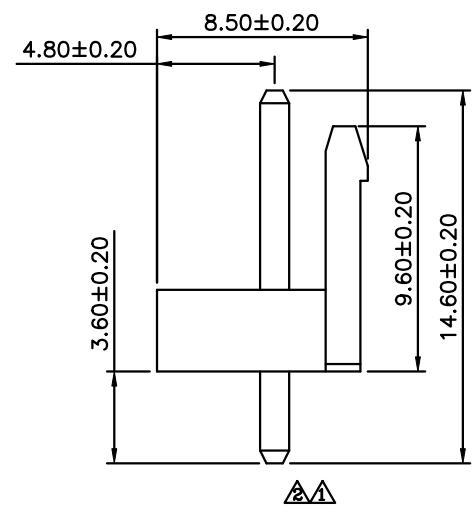
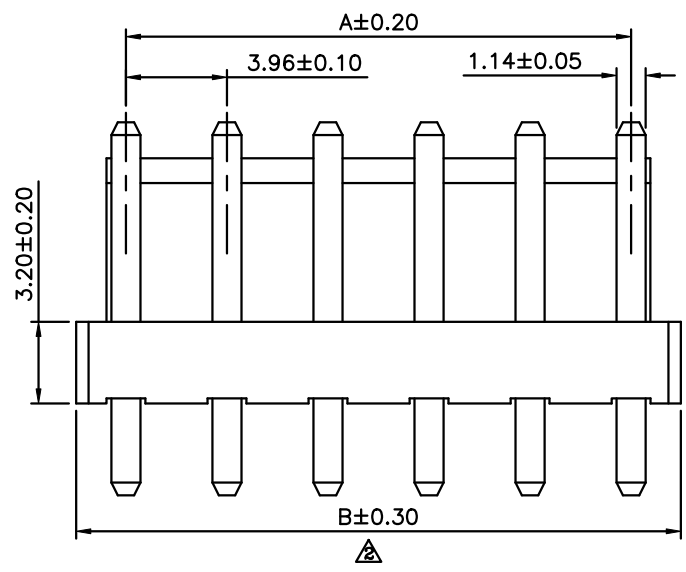


Recommended P.C.B. Layout

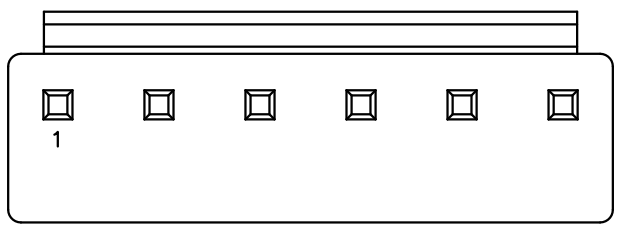

**SPECIFICATION**

Current Rating:7A AC,DC  
 Voltage Rating:250V AC,DC  
 Withstand Voltage:1500V AC/Minute  
 △ Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA66(UL94V-0),Nature  
 Contact:Brass,Tin Plated  
 RoHS Compliant

△ VH XX D - H  
 (1) (2) (3) (4)

- (1) VH:3.96mm VH Series
- (2) XX:No. Of Position
- (3) D:DIP Straight
- (4) H:RoHS Compliant

Pin	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°
PART No. VHXXD-H		MEI		
DRAWING No. VHXXD-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A2	UNIT mm		

NO. REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	06/21/2016
△ A1	Modify Data	HZF	10/20/2015
△ A0	NEW RELEASE	HZF	12/13/2012