

# WRA240 SERIES

3PH AC - DC DIN RAIL MOUNTABLE POWER SUPPLY  
INDUSTRIAL CONTROL EQUIPMENT



## FEATURES

- 3 PHASE AC INPUT VOLTAGE
- SELV COMPONENTS DESIGN
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- OVER TEMPERATURE PROTECTION
- PARALLEL FUNCTION AVAILABLE (SWITCH)
- 3 YEARS WARRANTY



## SELECTION CHART

### WRA 240 - 24

Wattage

24 : 24V OUT 48 : 48V OUT

## MODEL LIST

| MODEL NO.            | INPUT VOLTAGE        | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) |
|----------------------|----------------------|----------------|----------------|----------------|-------------|-------------|
| Single Output Models |                      |                |                |                |             |             |
| WRA240-24            | 3 $\phi$ 340~575 VAC | 240 WATTS      | + 24 VDC       | 10 A           | 88%         | 90%         |
| WRA240-48            | 3 $\phi$ 340~575 VAC | 240 WATTS      | + 48 VDC       | 5 A            | 89%         | 91%         |

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### GENERAL

| Characteristics               | Conditions                                      | min.                | typ.    | max.       | unit       |
|-------------------------------|-------------------------------------------------|---------------------|---------|------------|------------|
| Switching frequency           | Vi nom, Io nom                                  |                     | 25      |            | KHz        |
| Isolation voltage             | Input-Output                                    | 4,243 / 6,000       |         |            | VAC / VDC  |
|                               | Input-PE                                        | 2,828 / 4,000       |         |            | VAC / VDC  |
|                               | Output-PE                                       | 500 / 710           |         |            | VAC / VDC  |
|                               | Input-Output, @ 500VDC                          | 100                 |         |            | M $\Omega$ |
| Isolation resistance          | Operating at Vi nom                             | -40                 |         | + 71       | °C         |
| Ambient temperature           | Vi nom, from +61 to +71°C                       |                     |         | 2.5        | % / °C     |
| Derating (see derating curve) | Non operational                                 | -40                 |         | + 85       | °C         |
| Storage temperature           | Vi nom, Io nom                                  | 20                  |         | 95         | % RH       |
| Relative humidity             | Vi nom, Io min                                  |                     |         | $\pm$ 0.03 | % / °C     |
| Temperature coefficient       | Bellcore Issue 6 @40°C, GB                      | 24V                 | 520,000 |            | Hours      |
| MTBF                          |                                                 | 48V                 | 560,000 |            | Hours      |
| Altitude during operation     | EN 62368-1                                      |                     |         | 5,000      | m          |
| Dimension                     | Screw terminal type                             | L124 x W89 x D118.8 |         |            | mm         |
| Cooling                       | Free air convection                             |                     |         |            |            |
| Installation position         | Vertical ( other direction may derating using ) |                     |         |            |            |
| Pollution degree              |                                                 |                     | 2       |            |            |

### INPUT SPECIFICATIONS

| Characteristics           | Conditions                 | min. | typ.                               | max. | unit |
|---------------------------|----------------------------|------|------------------------------------|------|------|
| Nominal voltage *1        |                            |      | 1 $\phi$ or 3 $\phi$ 380 / 480 VAC |      |      |
| Rated input voltage       | Io nom                     | 400  |                                    | 500  | VAC  |
| Absolute input max. range | Ta min ... Ta max, AC in   | 340  |                                    | 575  | VAC  |
|                           | Io nom DC in               | 480  |                                    | 820  | VDC  |
| Input current             | Vi : 400 / 500 VAC, Io nom |      | 0.65 / 0.55                        |      | A    |

\*1. Single phase input is permissible, but output load is derated to 75%



## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### INPUT SPECIFICATIONS

| Characteristics        | Conditions           | min. | typ. | max. | unit |
|------------------------|----------------------|------|------|------|------|
| Rated input current    | Vi : 340 VAC, Io nom |      |      | 0.85 | A    |
| Line frequency         | Vi nom, Io nom       | 47   |      | 63   | Hz   |
| Inrush current         | Vi nom, Io nom       |      | 20   | 25   | A    |
| Power dissipation      | Vi : 400 VAC, Io nom |      | 30   |      | W    |
|                        |                      |      | 24   |      | W    |
| Leakage current        | Input-Output         |      |      | 0.25 | mA   |
|                        | Input-PE             |      |      | 3.5  | mA   |
| Power factor (Passive) | Vi nom, Io nom       |      | 0.55 |      |      |

### OUTPUT SPECIFICATIONS

| Characteristics                                     | Conditions                        | min.                                               | typ.                           | max.  | unit |
|-----------------------------------------------------|-----------------------------------|----------------------------------------------------|--------------------------------|-------|------|
| Output voltage accuracy (Adjusted before shipment)  | Vi nom, Io max                    | 0                                                  |                                | + 1   | %    |
| Minimum load                                        | Vi nom                            | 0                                                  |                                |       | %    |
| Line regulation                                     | Io nom, Vi min ... Vi max         |                                                    |                                | ± 1   | %    |
| Load regulation                                     | Vi nom, Io min ... Io nom         | single mode                                        |                                | ± 1   | %    |
|                                                     |                                   | parallel mode                                      |                                | ± 5   | %    |
| Voltage trim range                                  | Vi nom, 0.8 Io nom                | 24V model                                          | 22.5                           | 28.5  | VDC  |
|                                                     |                                   | 48V model                                          | 47                             | 56    | VDC  |
| Rated continuous loading                            | Vi nom                            | 24V model                                          | 10 A @ 24Vdc / 8.4 A @ 28.5Vdc |       |      |
|                                                     |                                   | 48V model                                          | 5 A @ 48Vdc / 4.2 A @ 56Vdc    |       |      |
| Hold up time                                        | Vi nom, Io nom                    | 20                                                 |                                |       | ms   |
| Turn on time                                        | Vi nom, Io nom                    |                                                    |                                | 1,000 | ms   |
|                                                     | Vi nom, Io nom → with 7000 μF CAP |                                                    |                                | 1,500 | ms   |
| Rise time                                           | Vi nom, Io nom                    |                                                    |                                | 150   | ms   |
|                                                     | Vi nom, Io nom → with 7000 μF CAP |                                                    |                                | 500   | ms   |
| Fall time                                           | Vi nom, Io nom                    |                                                    |                                | 150   | ms   |
| Transient recovery time                             | Vi nom, I ~ 0.5 Io nom            |                                                    |                                | 2     | ms   |
| Ripple & noise                                      | Vi nom, Io nom, BW = 20MHz        |                                                    |                                | 100   | mV   |
| Power back immunity                                 | Vi nom, Io nom                    | 24V model                                          | 35                             |       | VDC  |
|                                                     |                                   | 48V model                                          | 63                             |       | VDC  |
| Capacitor load                                      | Vi nom, Io nom                    |                                                    |                                | 7,000 | μF   |
| DC ON indicator threshold at start up (Green LED)   | Vi nom, Io nom                    | 24V model                                          | 17.6                           | 19.4  | VDC  |
|                                                     |                                   | 48V model                                          | 37                             | 43    | VDC  |
| DC LOW indicator threshold after start up (Red LED) | Vi nom, Io nom                    | 24V model                                          | 17.6                           | 19.4  | VDC  |
|                                                     |                                   | 48V model                                          | 37                             | 43    | VDC  |
| Parallel operation                                  | 0.1 Io min ~ 0.9 Io max           |                                                    |                                | 2     | unit |
| Efficiency                                          | Vi nom, Io nom, Po / Pi           | Up to 91%, See model list and typ efficiency curve |                                |       |      |

### CONTROL AND PROTECTION

| Characteristics                   | Conditions                                                                                      | min.                           | typ. | max. | unit |
|-----------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------|------|------|------|
| Input fuse                        |                                                                                                 | 2 A / 600 VAC internal / phase |      |      |      |
| Internal surge voltage protection | IEC 61000-4-5                                                                                   | Varistor                       |      |      |      |
| Rated over load protection        | Vi nom (see typ current limited curve)                                                          | 120                            |      | 140  | %    |
| Power Rdy (for 24V model only)    | Threshold voltage of contact closed(at start up)                                                | 17.6                           |      | 19.4 | VDC  |
|                                   | Electrical isolation                                                                            | 500                            |      |      | VDC  |
|                                   | Contact rating at 60VDC                                                                         |                                |      | 0.3  | A    |
| Over voltage protection           | Vi nom, 0.8 Io nom (Auto Recovery)                                                              | 24V model                      | 30   | 33   | VDC  |
|                                   |                                                                                                 | 48V model                      | 60   | 66   | VDC  |
| Output short circuit              |                                                                                                 | Hiccup mode                    |      |      |      |
| Over temperature                  | Detect on heat sink, shut down O/P voltage, recovers automatically after temperature goes down. | 100                            |      | 110  | °C   |
| Degree of protection              |                                                                                                 | IP20                           |      |      |      |

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

## APPROVALS AND STANDARDS


|                      |                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UL / cUL             | UL 508 Listed<br>UL 60950-1 Recognized<br>ISA 12.12.01(Class I, Division 2, Groups A, B, C and D)                                                                                                                                                                                                                                                                                   |
| TUV<br>cTUVus        | BS EN / EN 62368-1, EN 61558-1, EN 61558-2-16 (meet EN 60204-1)<br>UL 62368-1                                                                                                                                                                                                                                                                                                       |
| CE                   | BS EN / EN 61000-6-3, BS EN / EN 55032 Class B, BS EN / EN 61000-3-2, BS EN / EN 61000-3-3<br>BS EN / EN 61000-6-2, BS EN / EN 55035, BS EN / EN 61000-4-2 Level 4, BS EN / EN 61000-4-3 Level 3<br>BS EN / EN 61000-4-4 Level 4, BS EN / EN 61000-4-5 Level 4<br>BS EN / EN 61000-4-6 Level 3, BS EN / EN 61000-4-8 Level 4, BS EN / EN 61000-4-11<br>BS EN / EN 61204-3, CISPR 32 |
| CQC                  | GB4943.1, -, GB17625.1                                                                                                                                                                                                                                                                                                                                                              |
| Vibration resistance | meet IEC 60068-2-6 (Mounting on rail : 10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis )                                                                                                                                                                                                                                                                               |
| Shock resistance     | meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)                                                                                                                                                                                                                                                                                                             |

## PHYSICAL CHARACTERISTICS

|               |                                                                    |
|---------------|--------------------------------------------------------------------|
| Case size     | Screw terminal type 124 x 89 x 118.8 mm (4.88 x 3.5 x 4.68 inches) |
| Case material | Metal                                                              |
| Weight        | 1100g                                                              |
| Packing       | 1.18kg ; 16pcs / 20kg / 2.01CUFT                                   |

## MECHANISM & PIN CONFIGURATION

mm [inch]

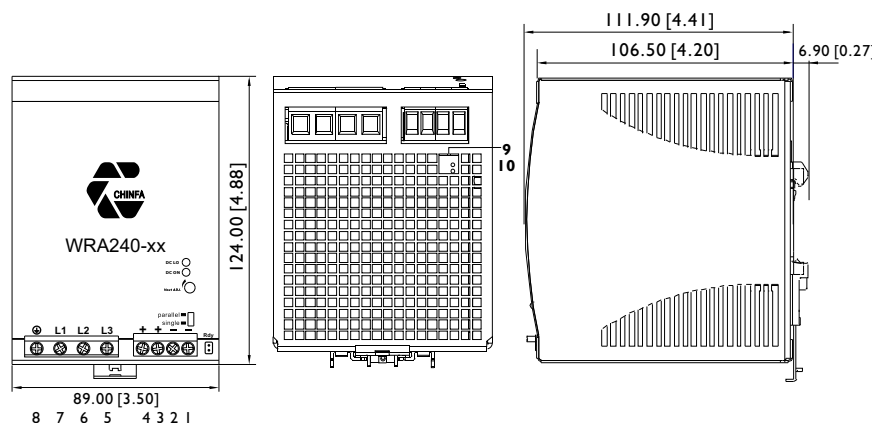

### CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail.

### INSTALLATION

Ventilation / Cooling  
Normal convection  
All sides 25mm free space  
For cooling recommended  
Connector size range  
AWG24-10 (0.2~4mm<sup>2</sup>) flexible / solid cable,  
-Input connector can withstand torque at maximum 9 pound-inches.  
-Output connector can withstand torque at maximum 5.5 pound-inches.  
8 m/m stripping at cable end recommends  
Use copper conductors only, 60 / 75°C

### GENERAL TOLERANCE


|                              |             |
|------------------------------|-------------|
| 0.00[0.00] - 30.00[1.18]     | ±0.30[0.01] |
| 30.00[1.18] - 120.00[4.72]   | ±0.50[0.02] |
| 120.00[4.72] - 400.00[15.75] | ±0.80[0.03] |

## PIN ASSIGNMENT

| PIN NO. | Designation |           | Description                                               |
|---------|-------------|-----------|-----------------------------------------------------------|
| 1, 2    | OUT         | V -       | Negative output terminal                                  |
| 3, 4    |             | V +       | Positive output terminal                                  |
| 5       |             | L3        | Input terminals                                           |
| 6       | IN          | L2        | Input terminals                                           |
| 7       |             | L1        | Input terminals                                           |
| 8       |             | ⊕         | Ground this terminal to minimize high-frequency emissions |
| 9       | OUT         | RDY       | A normal open circuit of PhotoMOS Relay (24V model only)  |
| 10      |             | DC ON     | Operation indicator LED                                   |
|         |             | DC LO     | DC LOW voltage indicator LED                              |
|         | OTHER       | Vout ADJ. | Trimmer-potentiometer for Vout adjustment                 |
|         |             | S / P     | Single / Parallel select switch                           |

## CIRCUIT SCHEMATIC


• Block diagram for WRA240 series

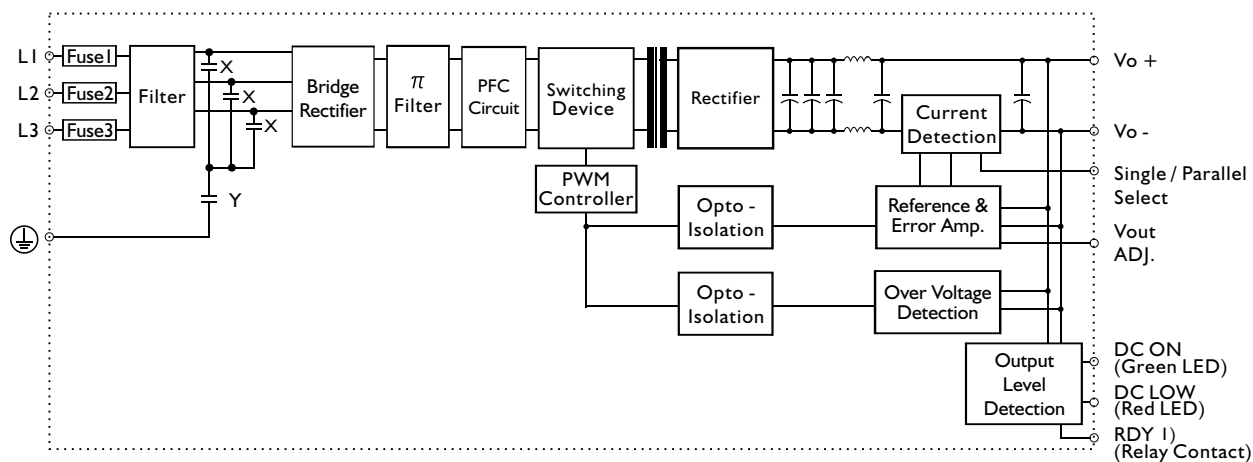


Note: 1) For 24V Model Only

## TYP. CURRENT LIMITED CURVE


WRA240-24 / 400Vac

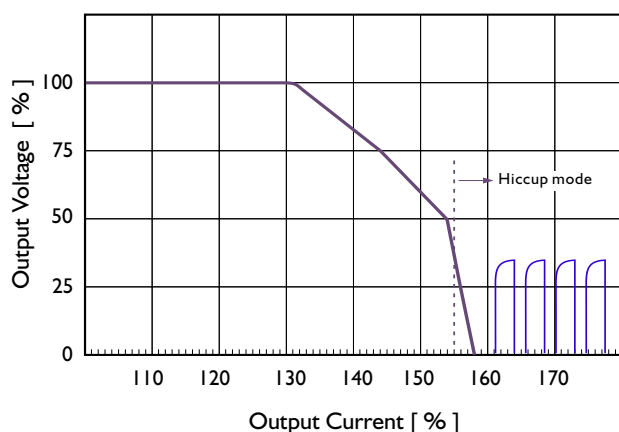

WRA240-24 / 500Vac

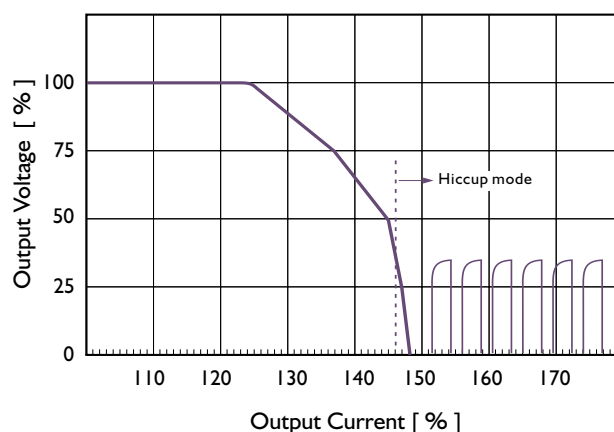

## DERATING CURVE

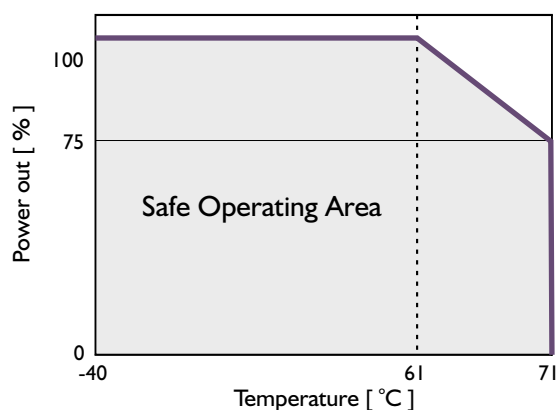

## TYP. EFFICIENCY CURVE

WRA240-24

