
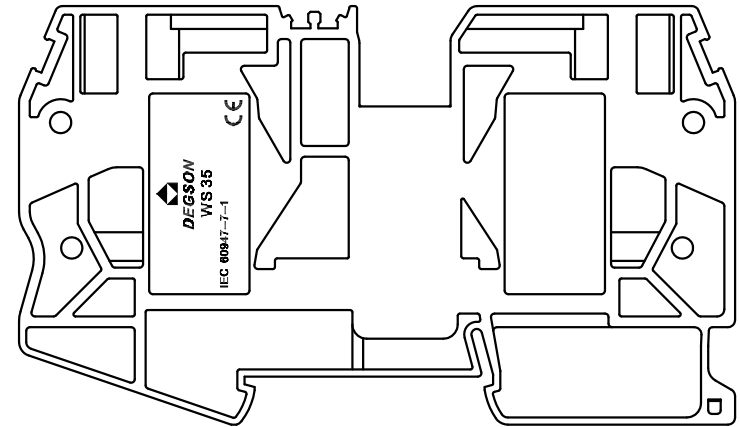

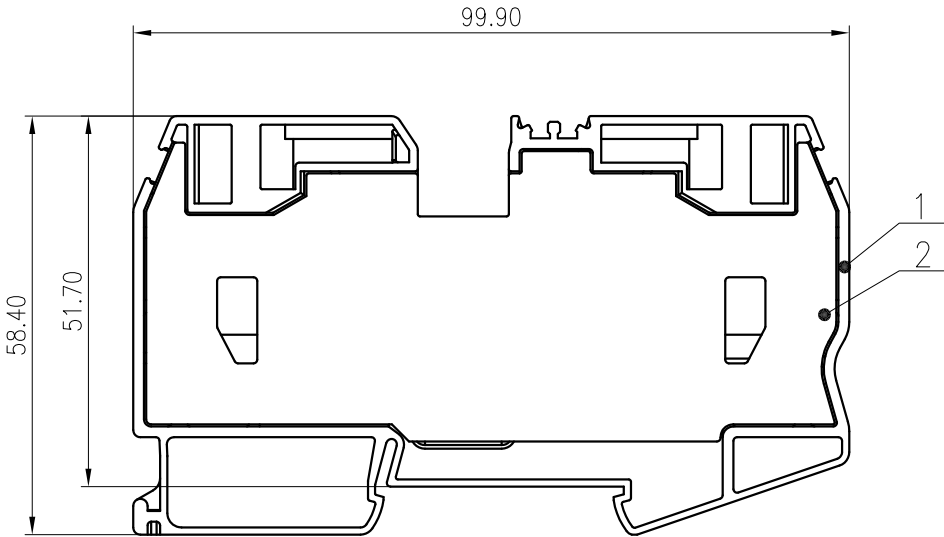


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

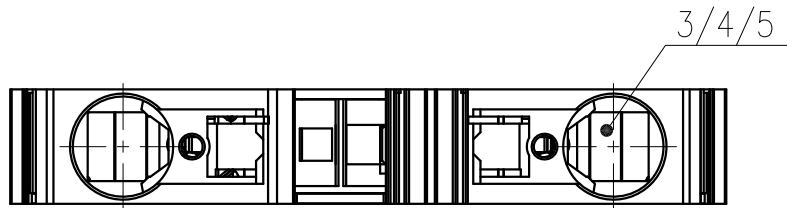

WS35-01P-1Y-00AH
WS35 - series
01P - no value
1 - no value
Y = 1 (grey color of housing/cover)
00AH - no value

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/115	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	1000/125	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	2.5~35/14~2		
间距/Pitch(mm)	16.0		
剥线长度/Stripping length(mm)	25		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

5	Spring 2	Stainless Steel	
4	Spring 1	Stainless Steel	
3	Current Carrier	Copper	Sn Plated
2	Cover	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.06.05	NAME: WS35-01P-1Y-00A(H)	
CHKD:	Mao J 2020.06.05	DRAWING NO.: WS35-C01	
DRFT:	Wang Y 2020.06.05	REV	D0-2
ITEM	NAME OF PART	MATERIAL	NOTES
1			
2			
3			
4			
5			
6			

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1
----------	-----------	------------------------	------------	-----------