

### Constant Voltage Driver

Model: XV26W12  
 XV26W24  
 XV26W36



CE SELV IP67



Model	Input Current Type	Input Voltage Range	Rated Output Power	Rated Output Current	Rated Output Voltage	Typical Efficiency	Certification
XV26W12	≤0.2A	220-240VAC	26W	0-2.17A	12V	83%	CE
XV26W24	≤0.2A	220-240VAC	26W	0-1.08A	24V	87%	CE
XV26W36	≤0.2A	220-240VAC	26W	0-0.72A	36V	87%	CE

### 1. Parameters




Category	Item	Technical Norm
Features	Output Type	Constant Voltage
	IP Grade	IP67
	Insulation Class	Class I
	Installation	Independent
Input	Rated Input Voltage	220-240Vac
	Operating Input Voltage	176-264Vac
	Input Frequency	Rated 50/60Hz
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤10% 230Vac/50Hz, 100% loading
	Input Current	≤0.2A (230VAC, full load)
	Leakage Current	0.7mAmax @240Vac 50Hz, IEC61347-1
	Input Under/Over Voltage	No damage of wrong mains voltage: 0V AC to 340V AC, 10minutes maximum
	Standby Power	<0.5W
	Lightning Surge	4KV line-line; 4KV line-earth
Output	Ripple Current(< 120 Hz)	±5%
	PstLM	>1
	SVM	>1
	Current Accuracy	±5%
	Line Regulation	±5%
	Load Regulation	±5%
	Overshoot	Constant current type <110%Io
	Start-up Time	≤0.5S @230Vac
	Hold up Time	10mS typical @ 230VAC


	Efficiency	≥ 83%, 83% typical @230Vac, refer to Efficiency vs. Load curve
Protection	Short Circuit	Auto recovery
	Over Current	Auto recovery
	Over Voltage	Auto recovery
	Over Temperature	Auto recovery
Environment	Operating Ambient Temperature	-40°C~+60°C, 10%RH~100%RH, Rated Load
	Storage Temperature	-40°C~+80°C; 5%RH~100%RH
	Operating Case Temperature for Safety	-40°C~+60°C; 5%RH~100%RH
	Operating Case Temperature for Warranty	-40°C~+80°C; Case temperature for 5 years warranty. Humidity: 10% RH to 100% RH.
Standards	Certification	CE
	Safety Standards	GB19510.1/IEC61347-1 GB19510.14/61347-2-13
	EMC Standards	GB17625 GB177*3 EN55015 EN61000-3-2 Class C EN61000-3-3
Others	MTBF	250 Khours, 10% failure rate,MIL-HDBK-217F
	Lifetime	50,000 hours, <70°C
	Dimensions	115X53X31.5mm(L*W*H)
	Net Weight	327g/PC
	Wiring	Input VDE: H05RN-F/3X1.0mm,Brown/Blue/(Yellow/Green) Output VDE: H05RN-F/2X1.0mm,Brown/Blue,
Notes: Unless specified, all the test results are measured in 25°C room temperature. * marked items are optional and contact with sales people to get the functions.		




## 2. Connected quantities of different current Breaker

TYPE	Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>	4mm <sup>2</sup>			
TYPE B		14	18	22	27	34	@230VAC	44	288us
TYPE C		22	28	35	44	55			
TYPE D		35	45	56	70	87			


### 3. Label

<p><b>INPUT</b></p> <p><input type="radio"/> ACL BN</p> <p><input type="radio"/> ACN BU</p> <p><input type="radio"/> ---GNVYR</p> <p>MADE IN CHINA www.kg-power.com S/N:</p>	<p><b>KGP LED Driver</b></p> <p>KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid</p> <p><b>MODEL: XV26W12</b></p> <p>INPUT:220-240V~Max.0.2A 50/60Hz PF:0.95 <span style="float: right;">●<math>t_c</math>90°C</span></p> <p>OUTPUT:12V <math>\equiv</math> 0-2.17A Max.26W</p> <p>Suitable for Dry, Damp and Wet Locations. <span style="float: right;">ta:60°C Input:220-240V~</span></p> <p>For LED Module only</p> <p><b>CE SELV IP67</b>   </p>	<p><b>OUTPUT</b></p> <p>Vo+ ---BN <input type="radio"/></p> <p>Vo- ---BU <input type="radio"/></p>
--	--	--



<p><b>INPUT</b></p> <p><input type="radio"/> ACL BN</p> <p><input type="radio"/> ACN BU</p> <p><input type="radio"/> ---GNVYR</p> <p>MADE IN CHINA www.kg-power.com S/N:</p>	<p><b>KGP LED Driver</b></p> <p>KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid</p> <p><b>MODEL: XV26W24</b></p> <p>INPUT:220-240V~Max.0.2A 50/60Hz PF:0.95 <span style="float: right;">●<math>t_c</math>90°C</span></p> <p>OUTPUT:24V <math>\equiv</math> 0-1.08A Max.26W</p> <p>Suitable for Dry, Damp and Wet Locations. <span style="float: right;">ta:60°C Input:220-240V~</span></p> <p>For LED Module only</p> <p><b>CE SELV IP67</b>   </p>	<p><b>OUTPUT</b></p> <p>Vo+ ---BN <input type="radio"/></p> <p>Vo- ---BU <input type="radio"/></p>
--	---	--


<p><b>INPUT</b></p> <p><input type="radio"/> ACL BN</p> <p><input type="radio"/> ACN BU</p> <p><input type="radio"/> ---GNVYR</p> <p>MADE IN CHINA www.kg-power.com S/N:</p>	<p><b>KGP LED Driver</b></p> <p>KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid</p> <p><b>MODEL: XV26W36</b></p> <p>INPUT:220-240V~Max.0.2A 50/60Hz PF:0.95 <span style="float: right;">●<math>t_c</math>90°C</span></p> <p>OUTPUT:36V <math>\equiv</math> 0-0.72A Max.26W</p> <p>Suitable for Dry, Damp and Wet Locations. <span style="float: right;">ta:60°C Input:220-240V~</span></p> <p>For LED Module only</p> <p><b>CE SELV IP67</b>   </p>	<p><b>OUTPUT</b></p> <p>Vo+ ---BN <input type="radio"/></p> <p>Vo- ---BU <input type="radio"/></p>
--	--	--

### 4. Lifetime vs. Case Temperature

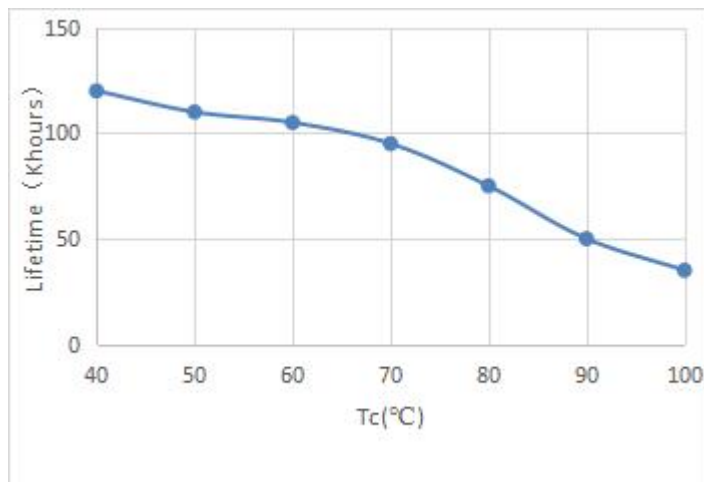

### 5. Power Factor, THD and Efficiency vs. Load

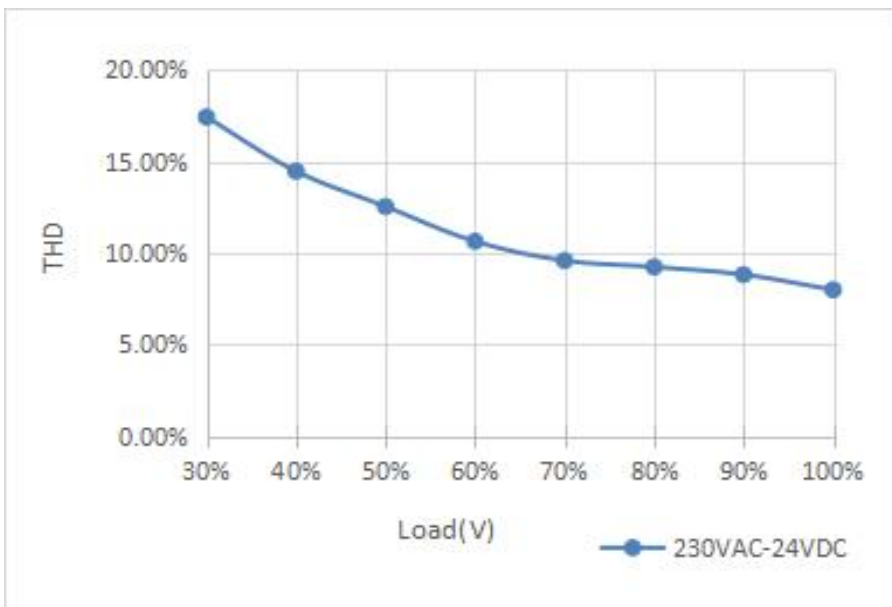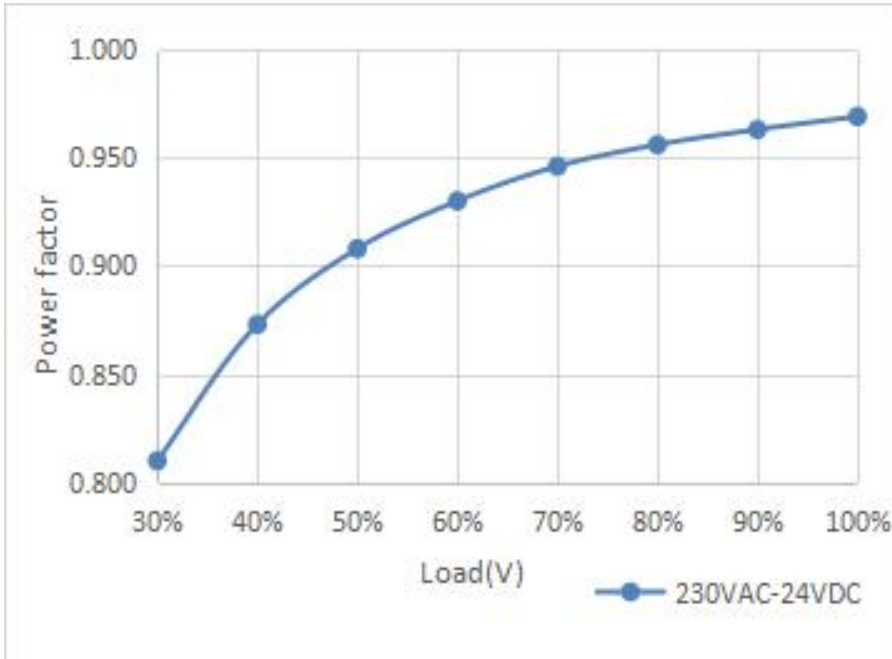

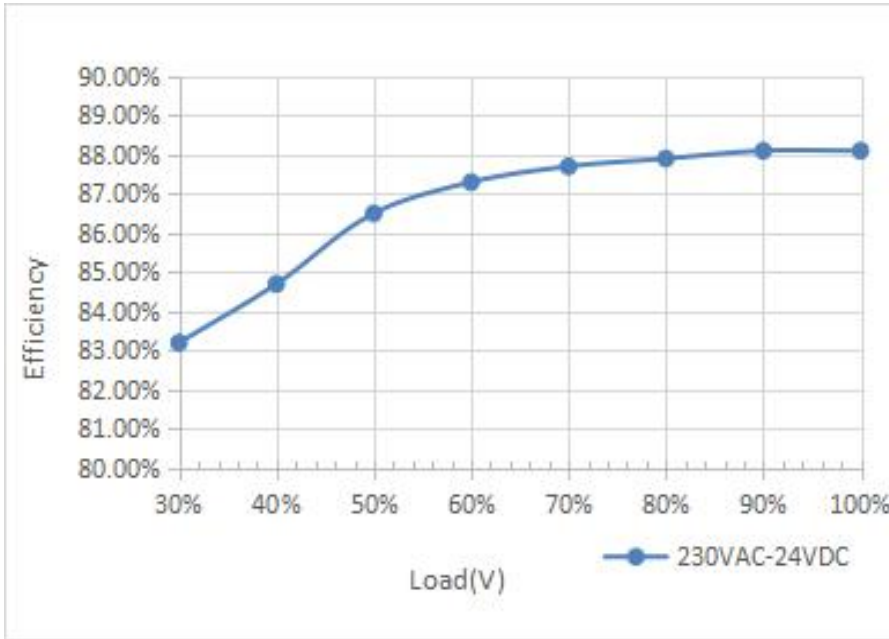


### 6. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
447*240*200	36Pcs	0.327	11.77	12.77

### 7. Mechanical Design

- VDE Cable

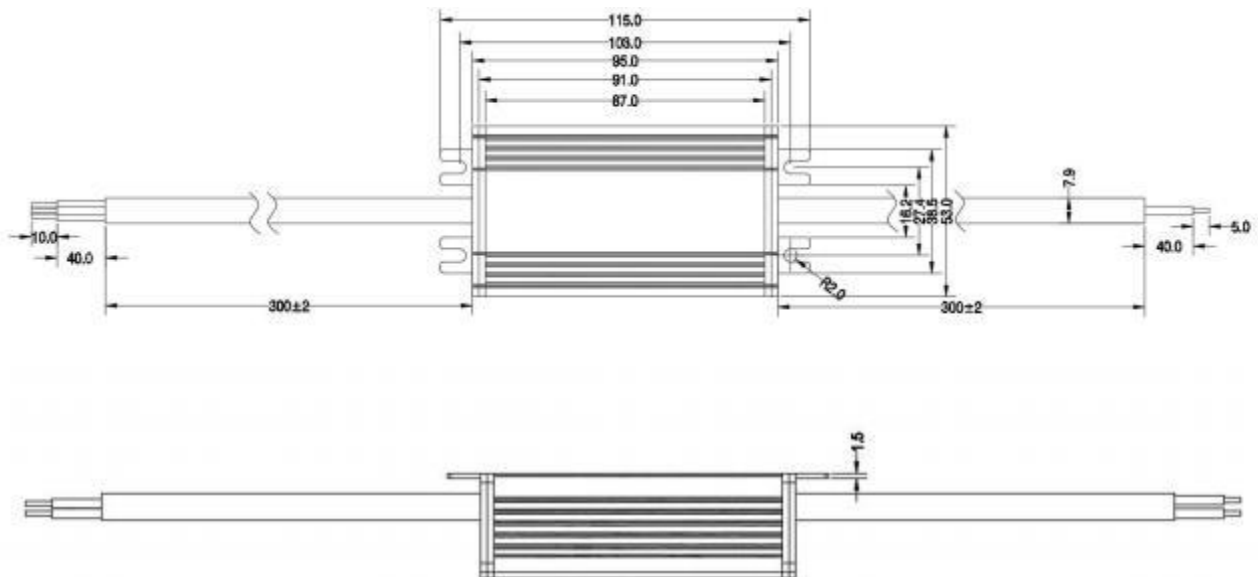

**8. Wiring instructions**

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)