


Recommended P.C.B. Layout



**SPECIFICATION**

Current Rating:1.0 Amps/Contact Max.  
 Withstand Voltage:300V AC/Minute  
 Contact Resistance:20 Milliohms/Contact Max.  
 Insulation Resistance:500 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 RoHS Compliant

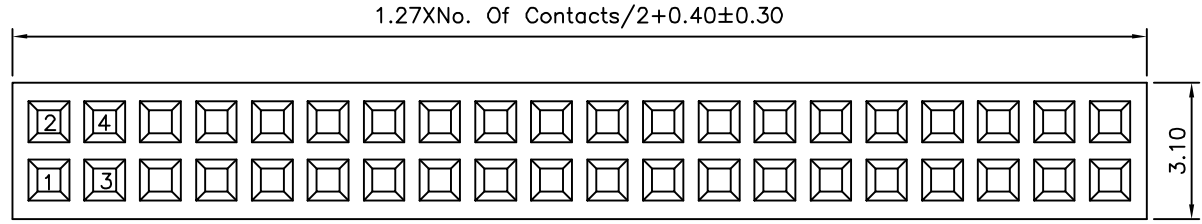

YA D 34 - 2 X XX - H H  
 (1) (2) (3) (4) (5) (6) (7)

- (1) YA:1.27X1.27mm Female Header
- (2) D:DIP Straight
- (3) 34:3.4mm Insulator Height
- (4) 2:Dual Row
- (5) XX:No. Of Position/Per Row
- (6) H:Withstand High Temperature Soldering
- (7) H:RoHS Compliant

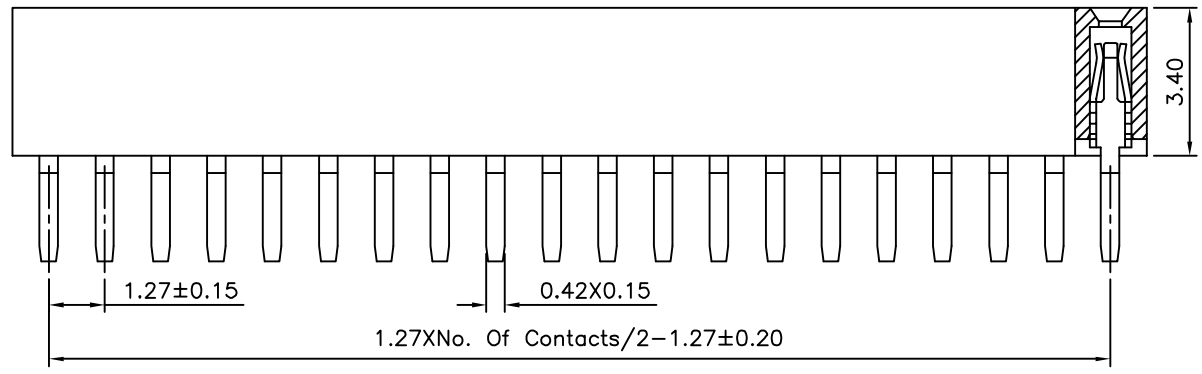

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 XX ±0.20 .XXX ±0.10 ANG. ±5°
PART No. YAD34-2XXX-HH		CHECKED BY HZF		
DRAWING No. YAD34-2XXX-HH		DRAWING BY YBL		
SCALE	NONE	REV.	A0	
UNIT	mm			NO. REV.

△ A0	NEW RELEASE	HZF	08/21/2013
NO. REV.	REVISIONS	CHK	DATE