

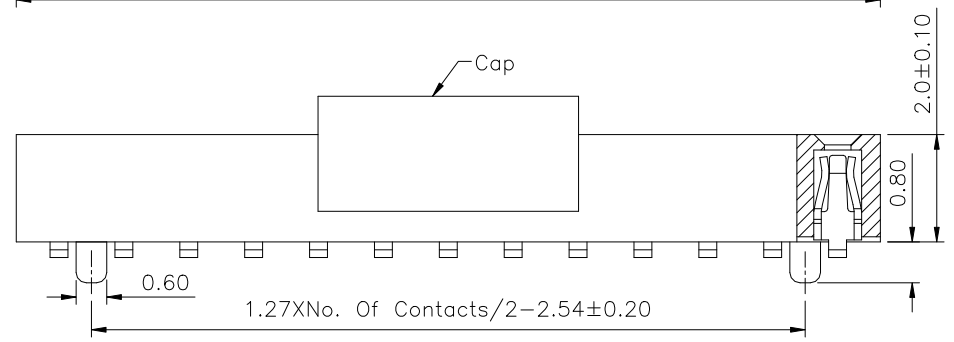


Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

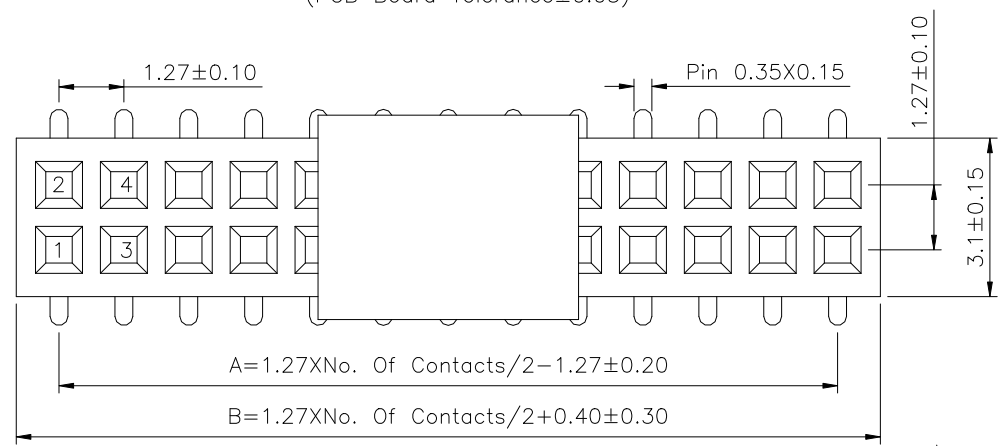

SPECIFICATION

Current Rating:1A
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

△ YA V P 22 - 2 X XX C - H
(1)(2)(3)(4) (5) (6)(7) (8)

- (1) YA:1.27X1.27mm Female Header
- (2) V:SMT Straight
- (3) P:With Post
- (4) 22:2.2mm Total Height
- (5) 2: Dual Row
- (6) XX:No. Of Position/Per Row
- (7) C:With Cap
- (8) H:RoHS Compliant

Pin	A	B	Pin	A	B
06	2.54	4.21	54	33.02	34.69
08	3.81	5.48	56	34.29	35.96
10	5.08	6.75	58	35.56	37.23
12	6.35	8.02	60	36.83	38.50
14	7.62	9.29	62	38.10	39.77
16	8.89	10.56	64	39.37	41.04
18	10.16	11.83	66	40.64	42.31
20	11.43	13.10	68	41.91	43.58
22	12.70	14.37	70	43.18	44.85
24	13.97	15.64	72	44.45	46.12
26	15.24	16.91	74	45.72	47.39
28	16.51	18.18	76	46.99	48.66
30	17.78	19.45	78	48.26	49.93
32	19.05	20.72	80	49.53	51.20
34	20.32	21.99	82	50.80	52.47
36	21.59	23.26	84	52.07	53.74
38	22.86	24.53	86	53.34	55.01
40	24.13	25.80	88	54.61	56.28
42	25.40	27.07	90	55.88	57.55
44	26.67	28.34	92	57.15	58.82
46	27.94	29.61	94	58.42	60.09
48	29.21	30.88	96	59.69	61.36
50	30.48	32.15	98	60.96	62.63
52	31.75	33.42	100	62.23	63.90

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No. △ YAVP22-2XXXC-H		MEI	
DRAWING No. YAVP22-2XXXC-H		CHECKED BY HZF	
SCALE NONE		DRAWING BY CYP	
REV. A1		UNIT mm	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20

△ A1	Modify P/N:YAVP24-2XXXC-H --> YAVP22-2XXXC-H	HZF	04/27/2016
△ A0	NEW RELEASE	HZF	01/27/2015
NO.REV.	REVISIONS	CHK	DATE