




未註公差/General tolerances(mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

A

B

C

D

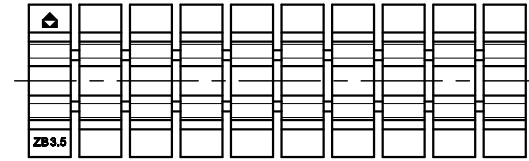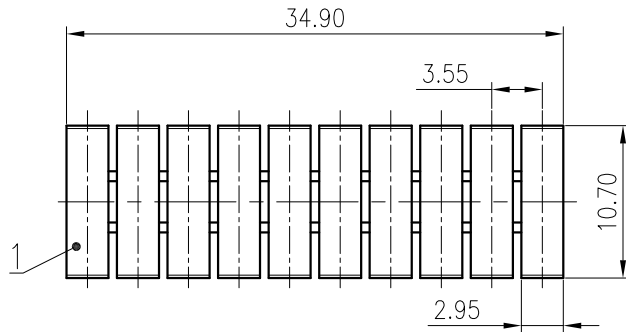

ZB3.5-10P-1Y-00AH
ZB3.5 - series of markers
10P - number of markers (10)
1 - single-row
Y - color of housing/marker (9 - white color)
00AH - no value

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles		3.55/10P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:	
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.06.06		
CHKD:	Mao J 2020.06.06		
DRFT:	Ding 2017.12.02	NAME: ZB3.5-10P-1Y-00A(H)	
DRAWING NO.:		ZB3.5-C01	REV T1
SIZE: A4		mm (inch)	TYPE: CUSTOMER DRAWING
SCALE: 2:1		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE