



**△ SPECIFICATION**



Current Rating:1A AC/DC  
 Voltage Rating:50V AC/DC  
 Withstanding Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0),Nature  
 RoHS Compliant

△△ Section:A-A

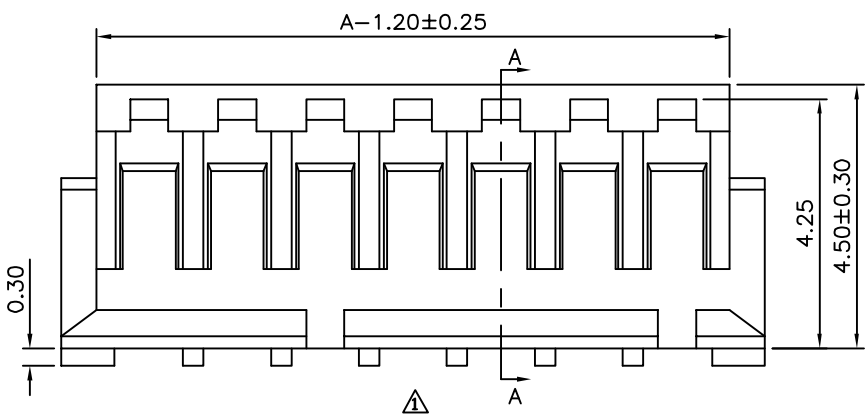

△ ZH XX H - H  
 (1) (2) (3) (4)

- (1) ZH:1.5 ZH Series
- (2) XX:No. Of Position
- (3) H:Female Housing
- (4) H:RoHS Compliant

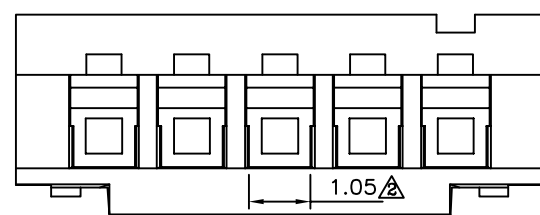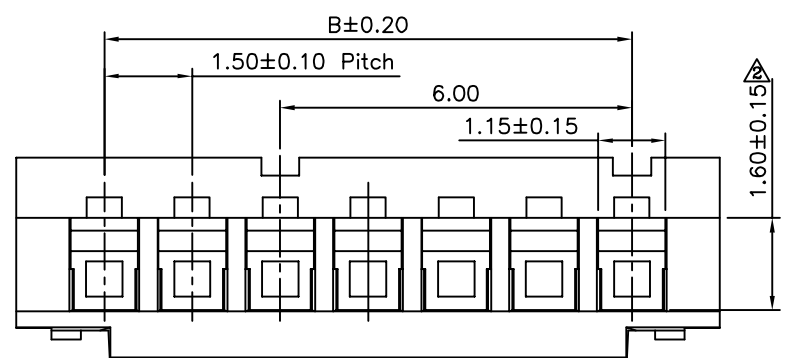

**△△**

Pin	A	B
02	4.50	1.50
03	6.00	3.00
04	7.50	4.50
05	9.00	6.00
06	10.5	7.50
07	12.00	9.00
08	13.50	10.50
09	15.00	12.00
10	16.50	13.50
11	18.00	15.00
12	19.50	16.50
13	21.00	18.00
14	22.50	19.50

△ 06~14 Pin △

△ 02~05 Pin

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.25 .XX ±0.20 .XXX ±0.10 X ±2° .XX ±1°	
PART No. ZHXXH-H		EMILY			
DRAWING No. ZHXXH-H		CHECKED BY HZF			
SCALE NONE		DRAWING BY GAO			
REV.	A2	UNIT	mm	UNIT	

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	03/07/2013
△	A1	Modify Data	HZF	05/28/2010
△	A0	NEW RELEASE	HZF	2004/10/07