
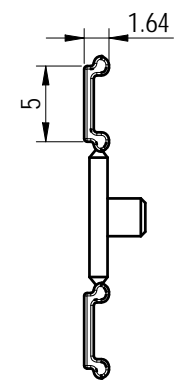


未注公差/General tolerances (mm)													0.1/10 ±2'	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

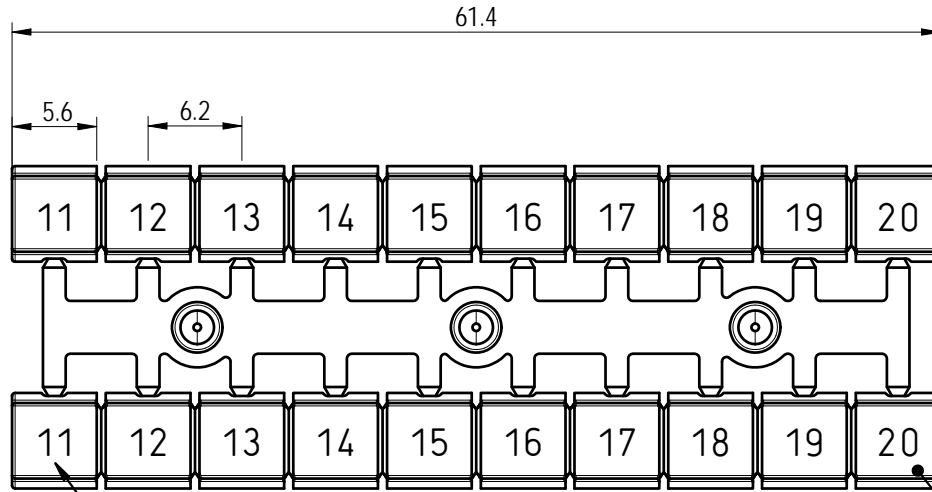

1.Color:Black
2.Font:DIN-1451

1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles			6.2/20P
使用温度范围/Operating temperature(°C)			- 40 ~+110
符合RoHS环保要求/Conform to RoHS			Yes

DEGSON		MATERIAL: PC	SURFACE/COLOR:	
MAT NO./REV: / 00		MAT STATUS: 批量		
APPD: 李根芳	2022. 12. 07	NAME		
CHKD: 马恩开	2022. 12. 07	ZK6-20P-1Y-33A (H)		
DRFT: 宗明志	2022. 12. 07			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200124279	CUSTOMER DRAWING	已发布	2:1	1/1

00		NEW DRAWING	宗明志	2022. 12. 07
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除特别说明外, 本文件的所有权保留。未经书面许可, 不得复制或传播。 除特别说明外, 本文件的所有权保留。 未经书面许可, 不得复制或传播。