


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/13/20'		

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

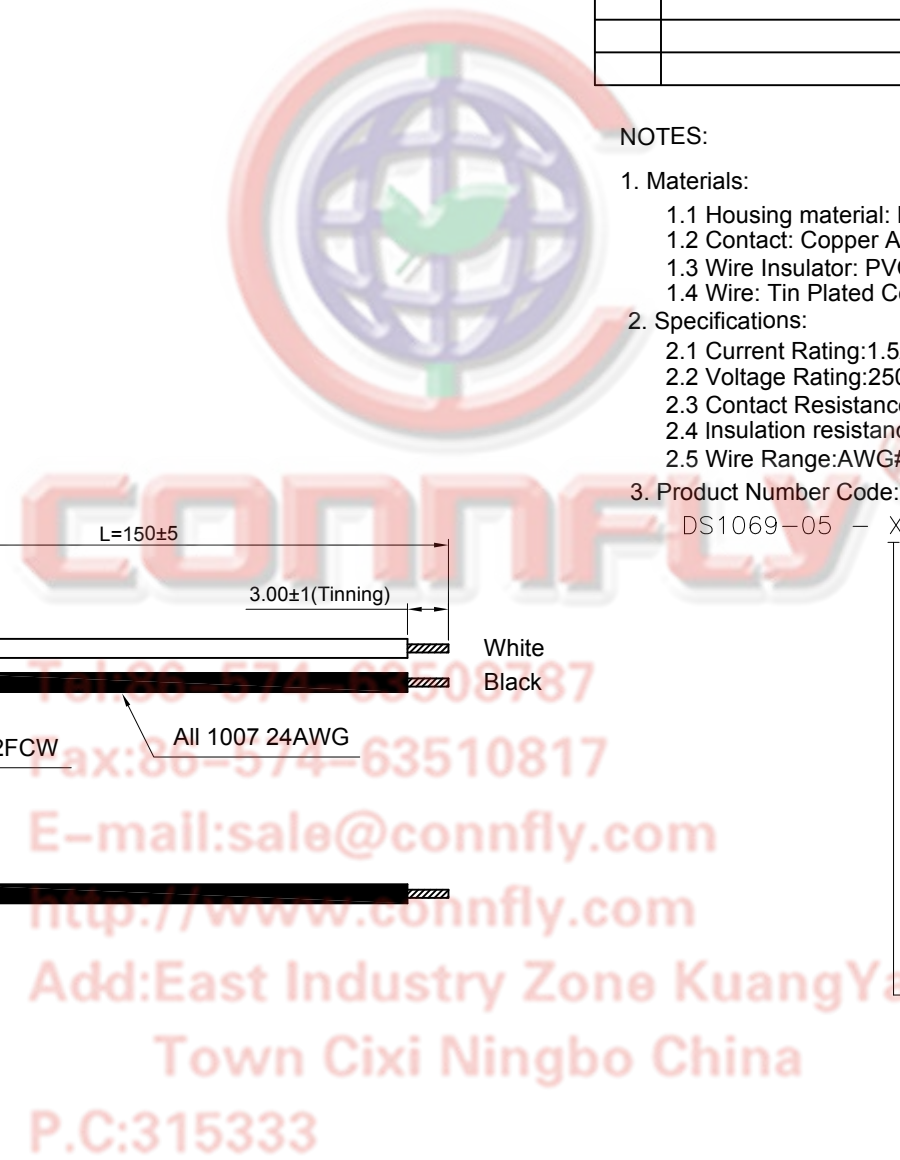


NOTES:

- Materials:
  - Housing material: Nylon 66
  - Contact: Copper Alloy
  - Wire Insulator: PVC
  - Wire: Tin Plated Copper
- Specifications:
  - Current Rating: 1.5A
  - Voltage Rating: 250V AC/DC
  - Contact Resistance: 20mΩ Max. (Connector Only)
  - Insulation resistance: 1000MΩ Min. (Connector Only)
  - Wire Range: AWG#24
- Product Number Code:

DS1069-05 - X X X X X X X - ELTECH - 041

- Length (DIM.L)  
150: 150mm
- Housing color  
W: White
- Contact plating  
6: Full Tin
- Mounting type  
C: Crimp
- Wire gauge  
24: AWG #24
- Connector type  
F: Female
- No. of contacts  
2

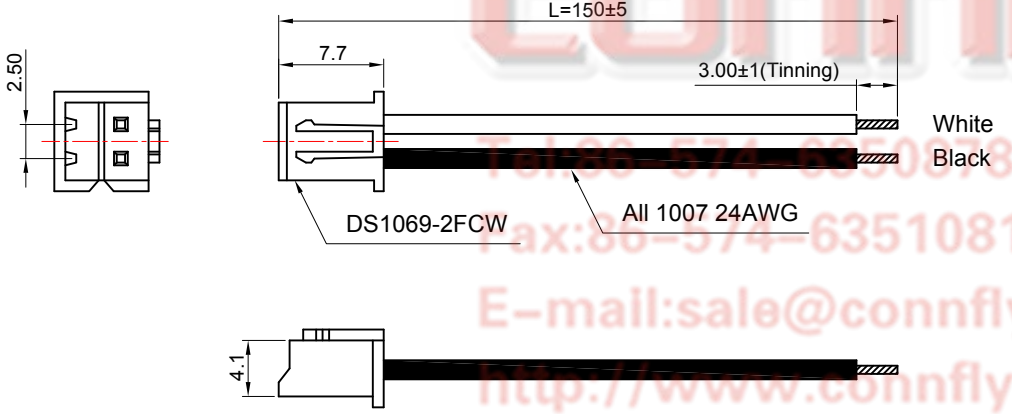

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.5mm XH Housing With Crimp Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1069-05 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1069-05-XXXXXX-A					
		SHEET	1 OF 1				

FOR ELTECH ONLY