

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failure or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/07/22'		

NOTES:

- Materials:
 - Housing material: Nylon 66,White.
 - Contact: Copper Alloy
 - Wire Insulator: PVC
 - Wire: Tin Plated Copper
- Specifications:
 - Current Rating:3A
 - Voltage Rating:250V AC/DC
 - Contact Resistance: 200mΩ Max.
 - Insulation resistance: 1000MΩ Min.
 - Wire Range:AWG#22(UL1007)
- Product number code:

DS1073-05 - X X X X X X X - C1 - ELTECH - 050

- Wire Length(Dim.L)
500: 500mm
- Housing Color
W: White
- Contact Plating
6: Tin
- Mounting type
C: Crimp
- Wire Gauge
22: UL1007 22AWG
- Connector type
F: Female
- No.of contact
3

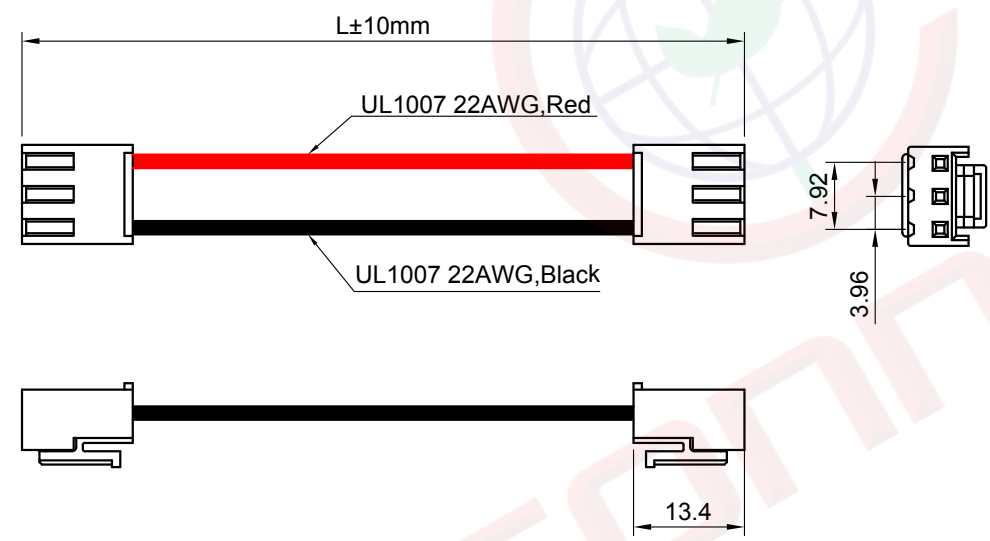

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1073-05-XXXXXX-A		

PROJECTION		TITLE	3.96mm VH TYPE
UNITS	mm		W/ CRIMP UL1007 WIRE
SHEET SIZE	A4	SERIES	DS1073-05 SERIES

FOR ELTECH ONLY

晨翔电子有限公司
CONNELY ELECTRONIC CO. LTD