



LC110W350-500

Constant Current Driver
Model:LC110W350-500



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
LC110W350-500	350mA	0.39A	84.0W	17.5-77.0W	0.94	92%	50-220V	250V
	400mA	0.44A	95.0W	20.0-88.0W	0.94	93%		
	450mA	0.49A	106.0W	22.5-99.0W	0.96	94%		
	500mA	0.55A	116.0W	25.0-110.0W	0.96	95%		

* Test result @230V, 50Hz, Full Load.

1.Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	IP Grade	IP20
	Insulation Class	Class I
Input	Rated Input Voltage	220-240V
	Range of AC Input Voltage	198-264VAC
	Range of DC Input Voltage	176-280VDC
	Frequency	0/50-60Hz
	Power Factor	≥0.96(230VAC, full Load, see graphs)
	THD	≤20%(230VAC, full Load, see graphs)
	No-load Power Consumption	≤0.5W @230VAC
Output	Current Accuracy	±5%
	Max. Output Voltage	250V
	Started Delay Time	≤0.5S (230VAC, full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin) / (Imax+Imin)
	PstLM	≤1
	SVM	≤0.4

	Emergency output coefficient	1
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	Insulation voltage	O/P to PE , 1.5KVac/1min I/P to PE , 1.5KVac/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 700μA
Environment	Ta/Operation Temperature	-20...+55°C
	Ts/Storage Temperature	-30....+85°C
	Tc/Enclosure Temperature	85°C
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Build-in
	PRI Wire preparation	0.5-1.5□
	SEC Wire preparation	0.5-1.5□
	Dimension	280*30*21mm (L*W*H)
Standards	Certification	CE、ENEC、EAC、UKCA、SAA
	Safety Standards	EN61347-1:2015 EN61347-2-13:2014/A1:2017 EN62384:2006/A1:2009 EN62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1
	EMC Standards	EN IEC 55015:2019 EN61547:2009 EN IEC 61000-3-2:2019 EN 61000-3-3:2013/A1:2019
	Performance	EN62384
	Surge	L-N:1KV; L/N-PE:2KV;
	Others	RoHS
Life Time		50000h Tc=85°C, F.R. <10%
		75000h Tc=80°C, F.R. <10%
		100000h Tc=75°C, F.R. <10%
Warranty		5years

Remark:

- All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
- LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live .

2. Output Current Setting

Output Current	Dial 1	Dial 2
500mA	ON	ON
450mA	OFF	ON
400mA	ON	OFF
350mA	OFF	OFF

3. Connected quantities of different current Breaker

TYPE	LC110W350-500 Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B		17	22	27	34	43	@230VAC	35	300us
TYPE C		27	36	44	55	69			
TYPE D		44	57	70	88	110			

4. Label

⊕

N

L

KGP
KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid
LED Driver
LC110W350-500
Constant Current Type

PIN1	PIN2	Input (mA)	Rated (mA)	Output (mA)	U _{in} / V _n	I _{in} (A)	ta [°C]	A
OFF	OFF	350	77		220-240V	0.39	-20...+50	0.94C
ON	OFF	400	88		050-60Hz	0.44		0.94C
OFF	ON	450	99			0.49		0.96
ON	ON	500	110			0.55		0.96

05 EAC

CE

UK CA

110

EL

Made in China

wire preparation
1.8mm wires 0.6-1.0

● I_o=85°C

U_{out}: Max. 250VDC

For LED modules only

OFF: ON

1


2

Output


-

+

5. Lifetime curve

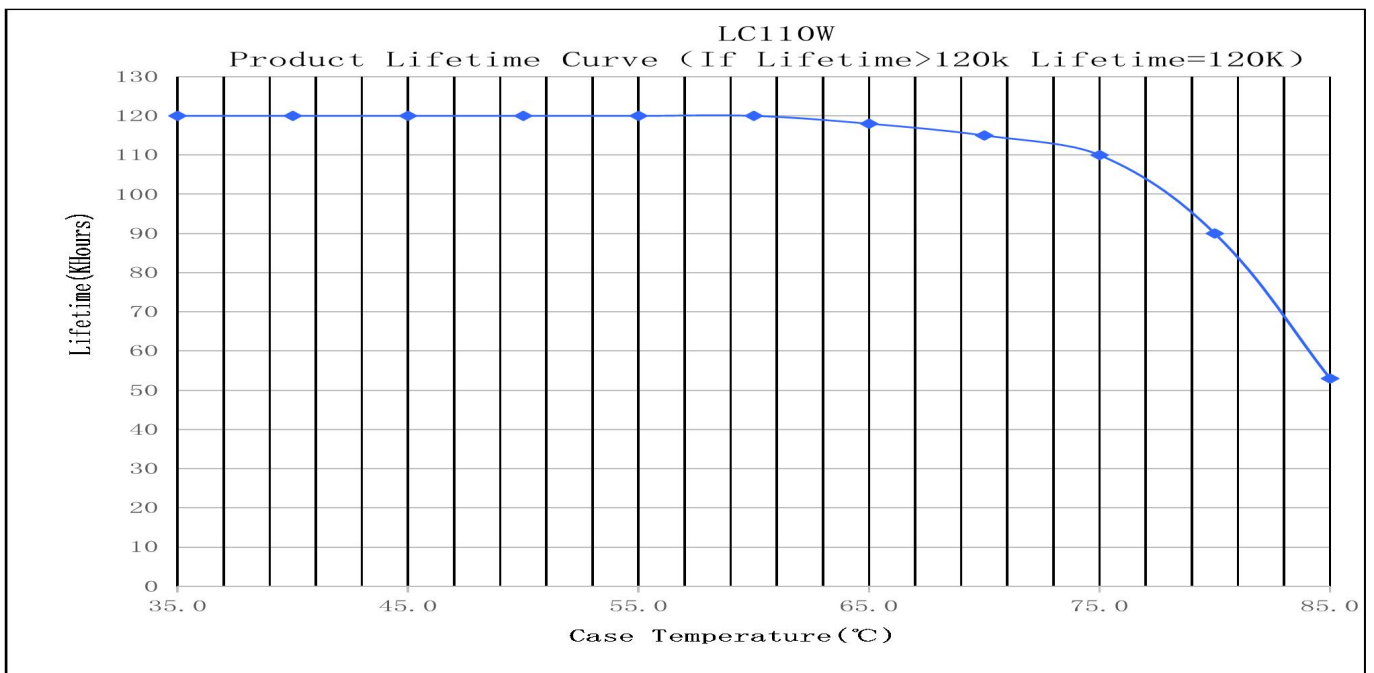


6.Dimension (Unit: mm)

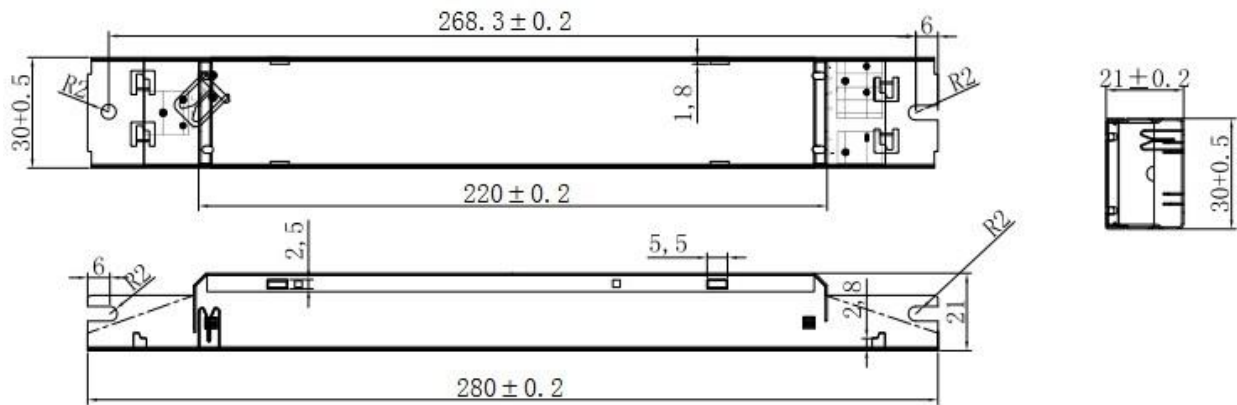

7.Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
335*300*138MM	50PCS	T.B.D	T.B.D	T.B.D

8.Wiring Diagram

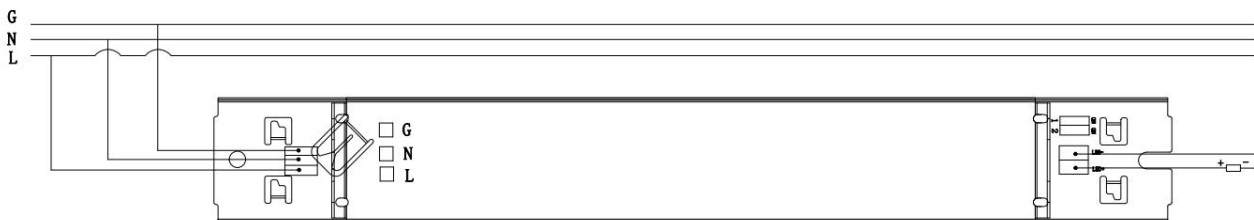

9.Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.



LC110W350-500

10.REVISION HISTORY

DATE	REV.	REMARK
2022-10-26	V1.0	Initial release.
2022-12-14	V1.1	Update the label.