



### Product Features:

- Universal input voltage / Full range: 90~305Vac;
- Constant power design, output current programming adjustable;
- (M types) offline programmable, (V types) output current adjustable by built-in potentiometer;
- 3-in-1 dimmable: 0~10Vdc, PWM, Positive and negative logic, Timer dimming, Dim-to-off;
- (M types)Constant lumen output, daily log;
- Output and Dimming Signal Isolating;
- Surge protection: 6KV line-line, 10KV line-earth;
- Protections: SCP, OVP, OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

### Application:

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

### DESCRIPTION

The X6-240W series is 240W outdoor offline programmable LED driver that operates in constant current with high PF value and universal input voltage range 90~305Vac model. Offline Monitored by dimming cable connected with an USB kit programming device, the fully programmed drivers offer all dimming, dim-to-off, constant lumen output options and a wide range of output current in a single driver, which deliver maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be programmed for many different luminaire designs. X6 provides built-in timer dimming schedules further increasing the energy savings and CO<sub>2</sub> reductions achieved with LED lighting. It also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enables the driver to operating with high reliability, and extending product lifetime. Overall protection is provided against lightning surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.

### MODELS


Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Full Power Output Voltage Range (Vdc)	Full Power Current Adjustable Range (A) [2]	Default Output Current Setting(A)	Typical Efficiency [3]	PF
X6-240Y086	240	43-86	57-86	2.80 - 4.20	4.20	92.5%	0.97

### Notes:

- [1]. Y can be M or V. Y=M means dimmable and offline programmable, The adjustable lout range: 10%-100% I<sub>max</sub>; Y=V means non-dimmable and output current adjusted by built-in potentiometer.
- [2]. Output current adjustable range with constant power at max output power.
- [3]. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

### OPERATING AREA I-V

X6-240Y086

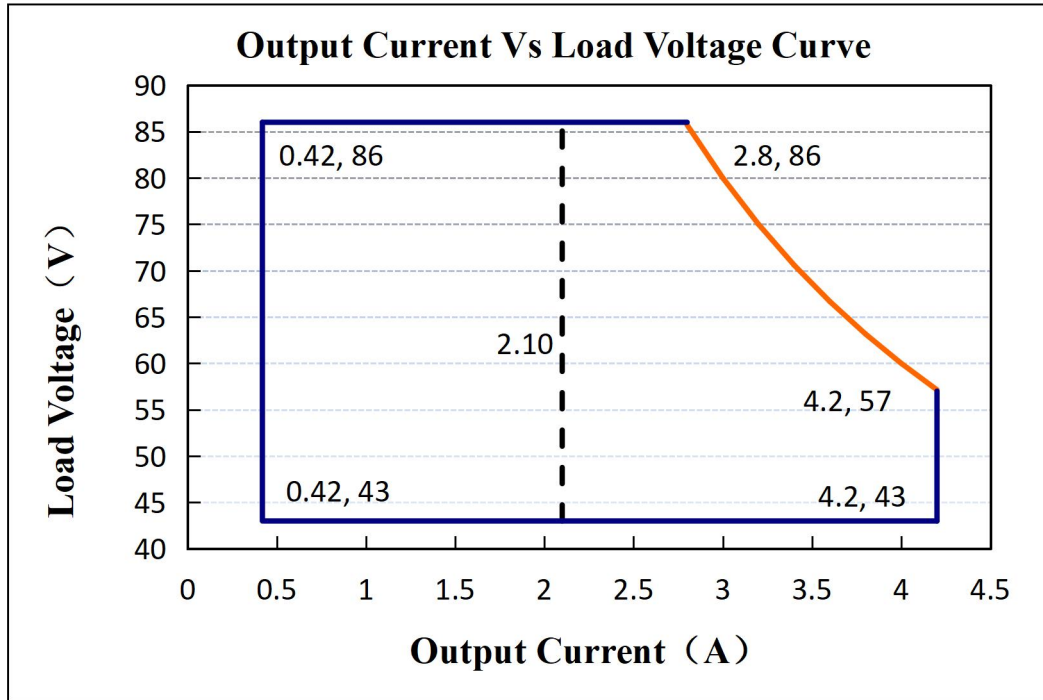

**Notes:** The drivers are not allowed to work in over-load condition, otherwise warranty will expire.

Y=V is suitable for the right area of the dotted line; Y=M is suitable for the solid line contain area.

### INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes	
Input Voltage	90Vac	100-277Vac	305Vac		
Input Frequency	47Hz	50/60	63Hz		
Leakage Current	-	-	0.70mA	277Vac/60Hz	
Input AC Current	-	-	3.3A	100-277Vac & full load	
Inrush Current	-	-	75A	230Vac & full load	
Standby Power Consumption			2W	230Vac/50Hz Dim to off	
Power Factor	0.97	0.99	-	120Vac, 50-60Hz, full load	
	0.95	0.97		230Vac, 50-60Hz, full load	
	0.92	0.95		277Vac, 50-60Hz, full load	
THD	-	5%	10%	100-240Vac, 50-60Hz, 70%-100% load	
	-	-	15%	277Vac, 50-60Hz, 70%-100% load	
Max. NO. of PSUs on CIRCUIT BREAKER	B10	1	B16	2	230Vac
	C10	2	C16	3	

## OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-8%	-	+8%	
Output Current Setting Range (A) X6-240Y086	2.10		4.20	The 'M type' adjustable Iout range: 10%-100% I <sub>max</sub> .
Output Current Setting Range with Constant Power (A) X6-240Y086	2.80		4.20	
Total Output Current Ripple(pk-pk)	-	5%	10%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	100~277Vac & 100% Load, load is LED.
No Load Output Voltage(V) X6-240Y086	-	-	110	
Line Regulation	-1%	-	+1%	25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac.
Load Regulation	-3%	-	+3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%.
Turn-on Delay Time	-	0.5S	2S	120Vac, 100% load
	-	-	0.5S	230Vac, 100% load

## GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @120Vac X6-240Y086 I <sub>o</sub> =2.10 I <sub>o</sub> =4.20	88.5% 88.5%	90.5% 90.5%	- -	Measured at full load and 25°C ambient temperature
Efficiency @230Vac X6-240Y086 I <sub>o</sub> =2.10 I <sub>o</sub> =4.20	90.5% 90.5%	92.5% 92.5%	- -	
Efficiency @277Vac X6-240Y086 I <sub>o</sub> =2.10 I <sub>o</sub> =4.20	91% 91%	93% 93%	- -	
Dielectric Strength	Input-Output	-	3750Vac	Max 5mA/60S
	Input-PE	-	1600Vac	
	Output-PE	-	1600Vac	
Grounding Resistance	-	-	0.1Ω	25A/60S, under 25°C±10°C ambient temperature
Insulation Resistance	10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF	-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)
Lifetime	-	50000Hrs	-	t <sub>c</sub> = 75°C, 0.1% / 1`000 h failure rate 230Vac&80% load
Ambient Temperature	-40°C		+60°C	Reference derating curve
Operating Case Temperature for Safety T <sub>c_s</sub>	-40°C	-	+90°C	
Operating Case Temperature for Warranty T <sub>c_s</sub>	-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 95% RH
Storage Temperature	-40°C	-	+85°C	Humidity: 5% to 100% RH
Dimensions (L*W*H)mm	L208.6*W68*H39			

Net Weight	1100±100g/PCS	
Package	L502mm*W372mm*H222mm; 15PCS/Ctn, Gross Weight: 16.2Kg	

### DIMMING

Parameter		Min.	Typ.	Max.	Notes
0~10V Absolute Maximum Voltage on the Vdim (+) Pin		-	10V	-	
0~10V Source Current on Vdim(+)Pin		-	200uA	400uA	
Dimming Output Range	X6-240M086	10%Imax	-	100%Imax	Imax=4.20A
	X6-240M086	0.42A		4.20A	
Recommended Dimming Range for 0-10V		0V	-	10V	Default 0-10V/ PWM Dimming(0-10V,0-9V,0-5V,0-3.3V Positive and Reverse Logic can be customized as request)
PWM_in High Level		9.7V	-	10.3V	
PWM_in Low Level		0V	-	0.3V	
PWM_in Frequency Range		300Hz		2KHz	
PWM_in Duty Cycle		1%	-	99%	

### SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
		EN62384	√
ENEC			
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	√
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	√
		AS/NZS 61347.1	√
EAC	Russia	ГОСТ Р МЭК 61347-1-2011 ГОСТ IEC 61347-2-13-2013 ГОСТ IEC 62493-2014 СТБ EH 55015-2006 ГОСТ IEC 61547-2013 ГОСТ 30804.3.2-2013 (IEC 61000-3-2:2009) ГОСТ 30804.3.3-2013 (IEC 61000-3-3:2008)	√

**Insulation**

Insulation	Input/Mains	Dimming	LED Output	Case
Input/Mains	/	Double	Double	Basic
Dimming	Double	/	Basic	Basic
LED Output	Double	Basic	/	Basic
Case	Basic	Basic	Basic	/


**EMC COMPLIANCE**

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	√


**NOTE:**

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.


### INRUSH CURRENT WAVEFORM

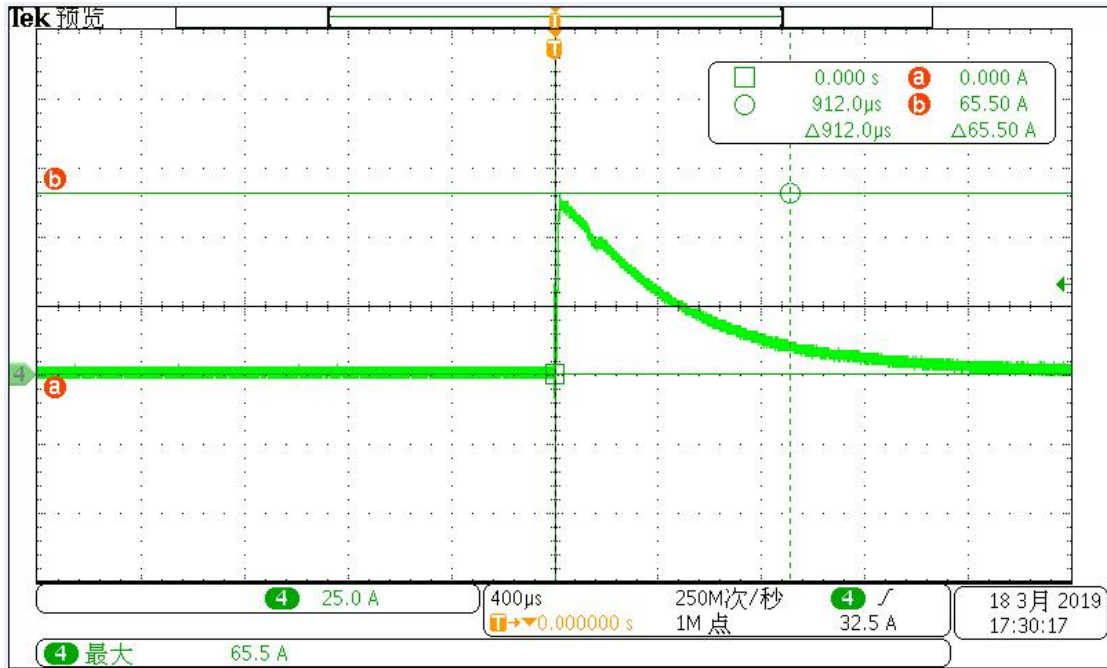


### DERATING CURVE

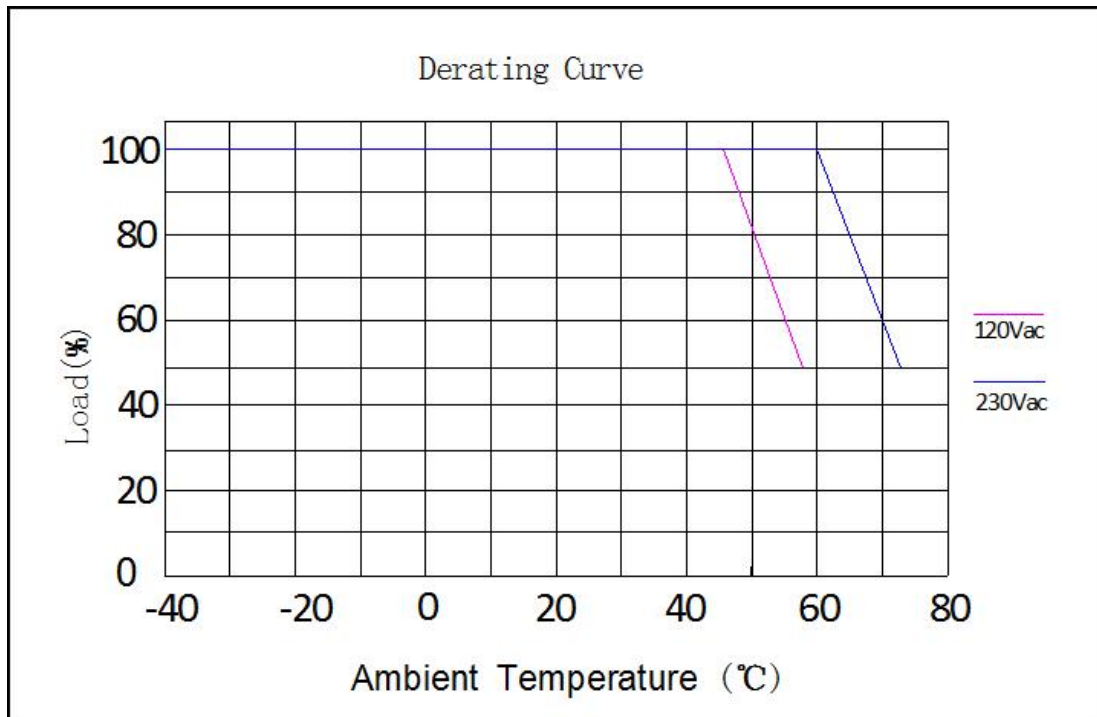

### OUTPUT POWER VS INPUT VOLTAGE

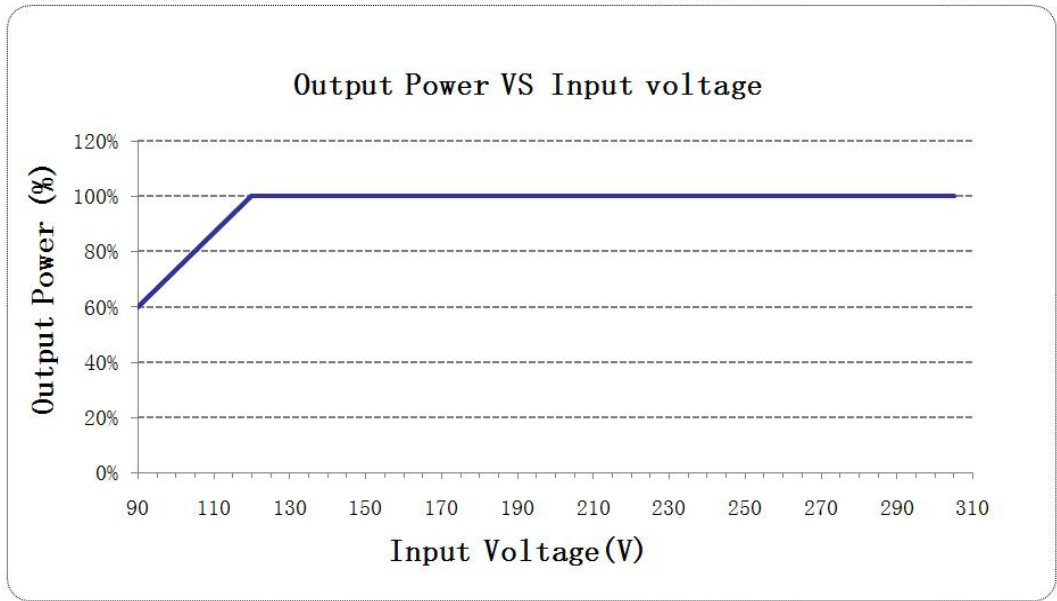


### LIFETIME VS CASE TEMPERATURE

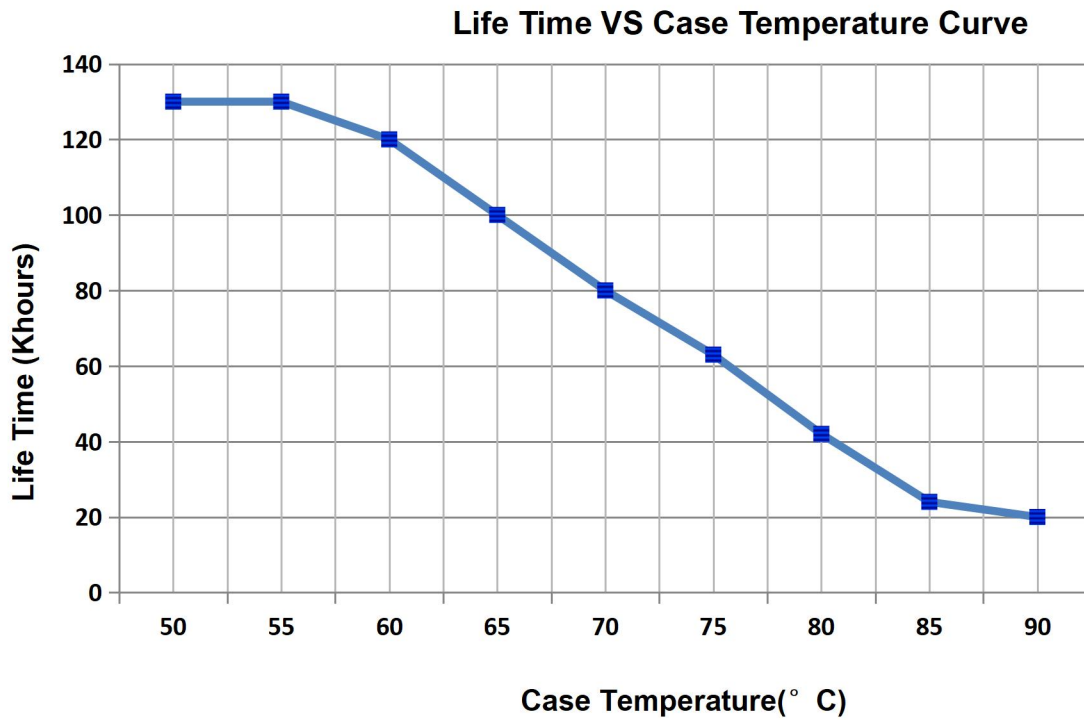


### EFFICIENCY VS LOAD

X6-240Y086


I<sub>o</sub>=2.80A

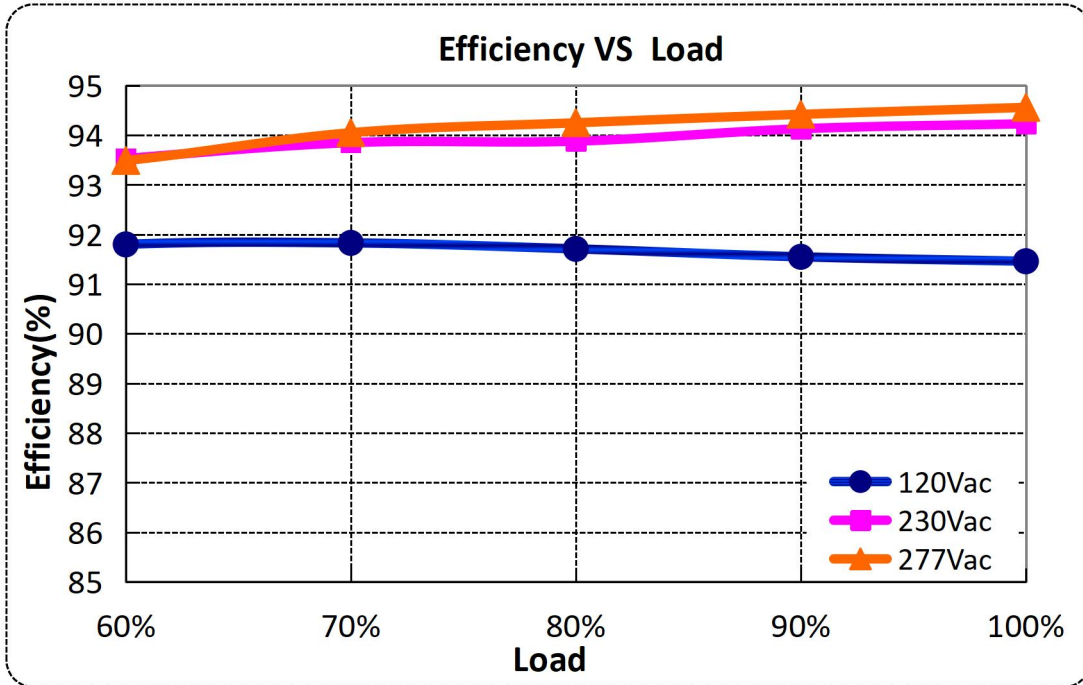


X6-240Y086 I<sub>o</sub>=4.20A

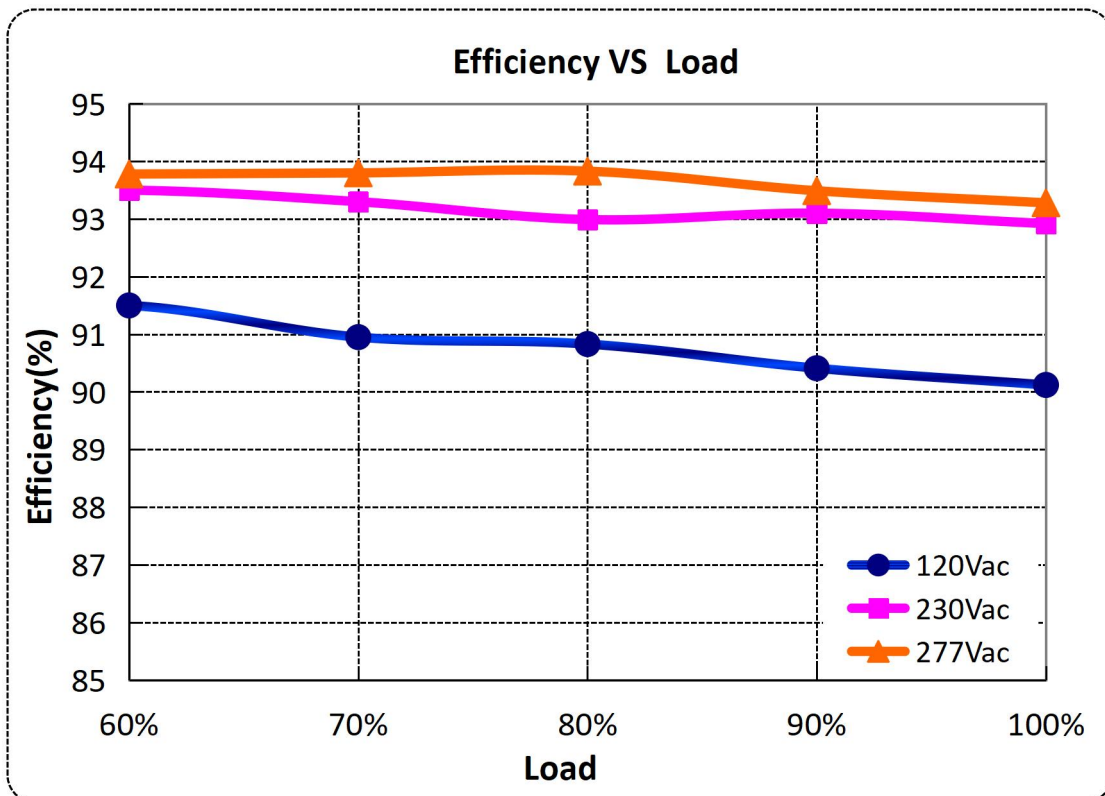

### POWER FACTOR VS LOAD

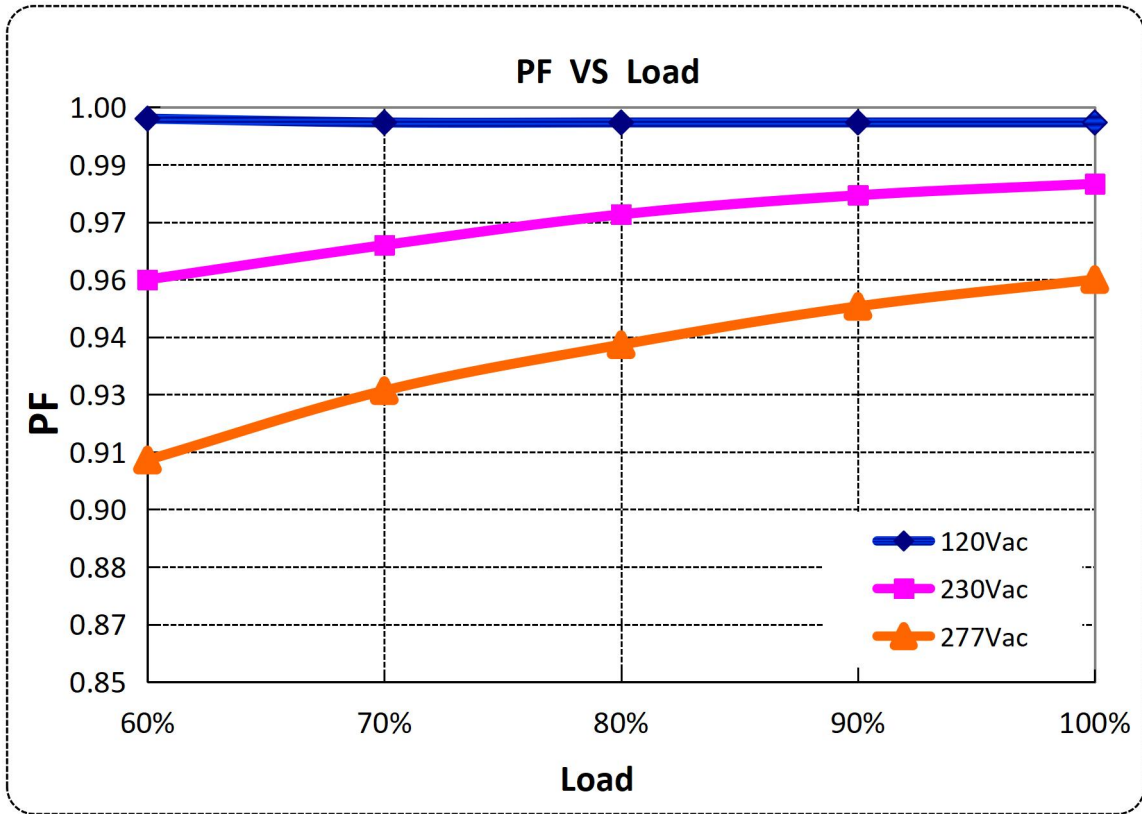

### TOTAL HARMONIC DISTORTION

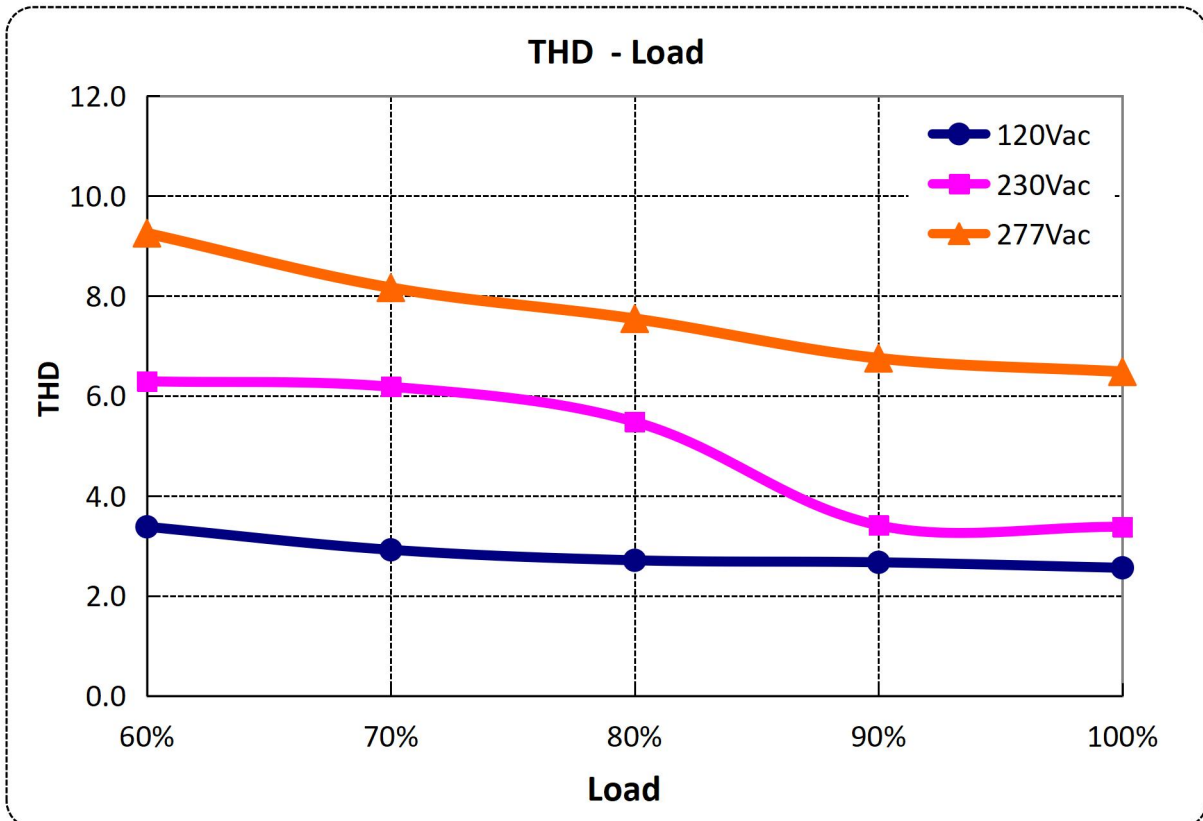


### PROTECTIONS

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Constant current mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Run into protection model when output voltage exceeds limit, and return to normal when the fault.

### 0-10V/PWM

#### 0-10V/PWM Dimming Curve

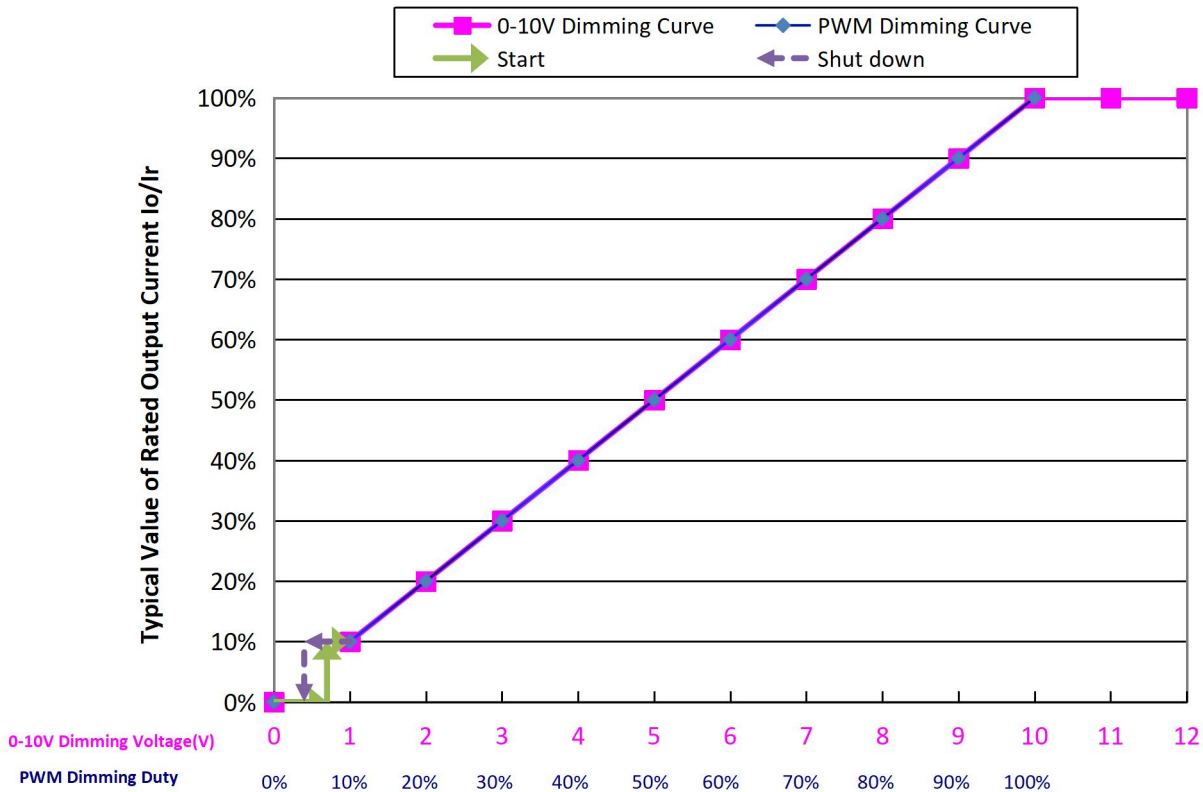


#### Note:


Dim to off model is realized by decreasing the output voltage, the power supply still has residual voltage when dim to off, so the start up voltage of the lamp should be higher than residual voltage.

### MECHANICAL OUTLINE

X6-240M086 types

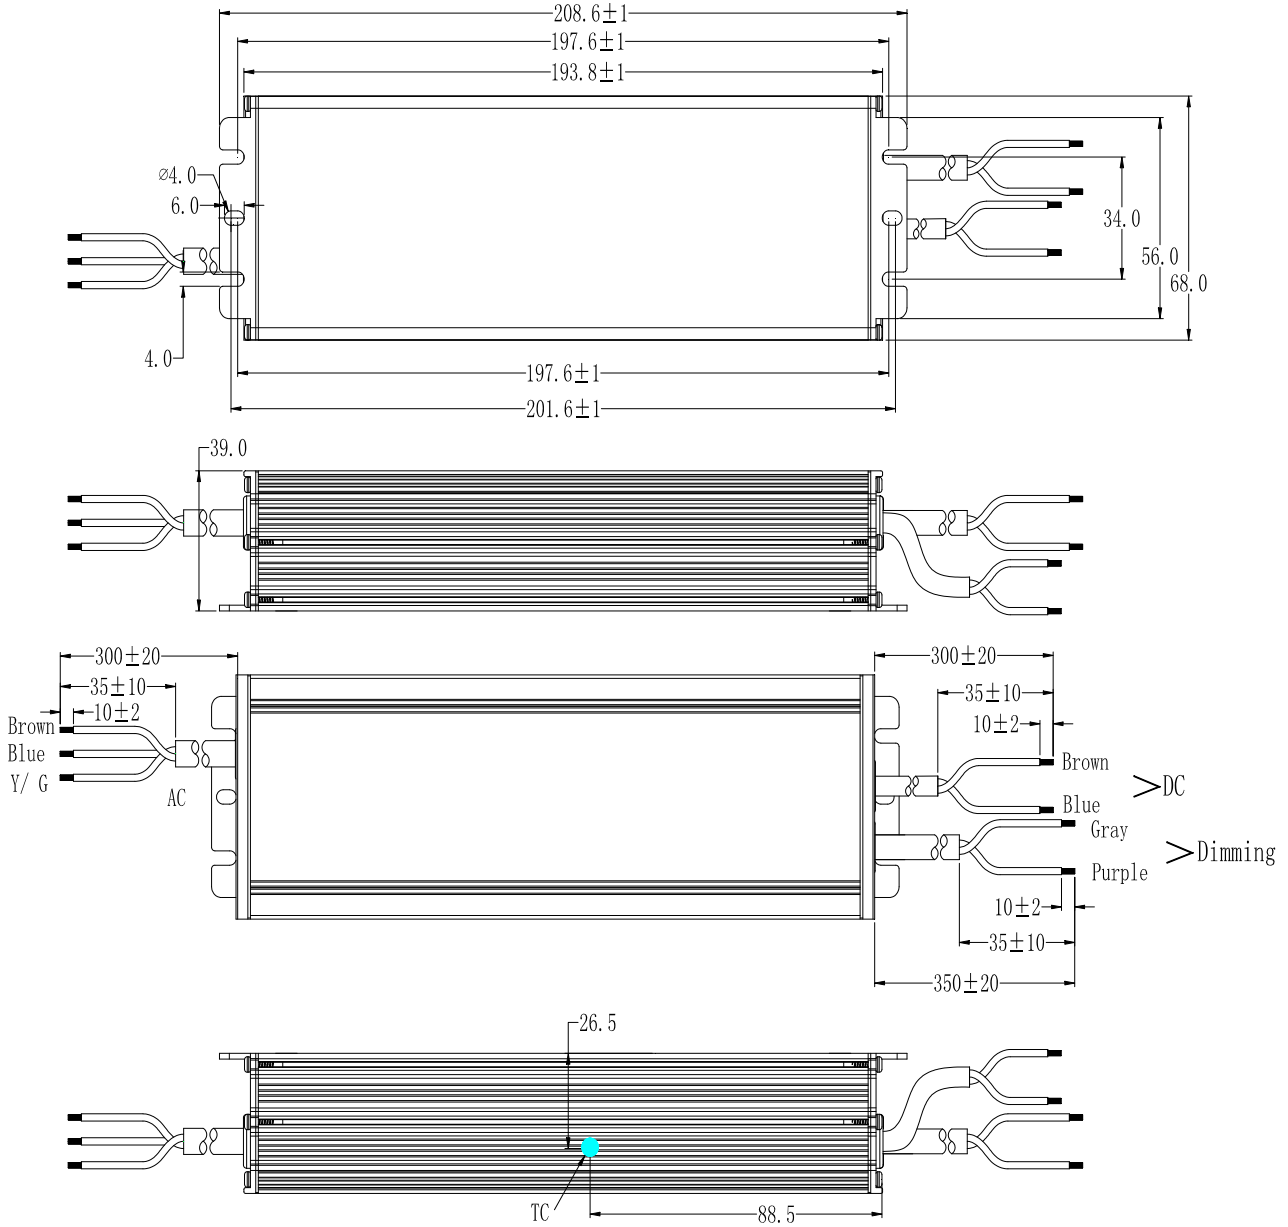

X6-240V086 types

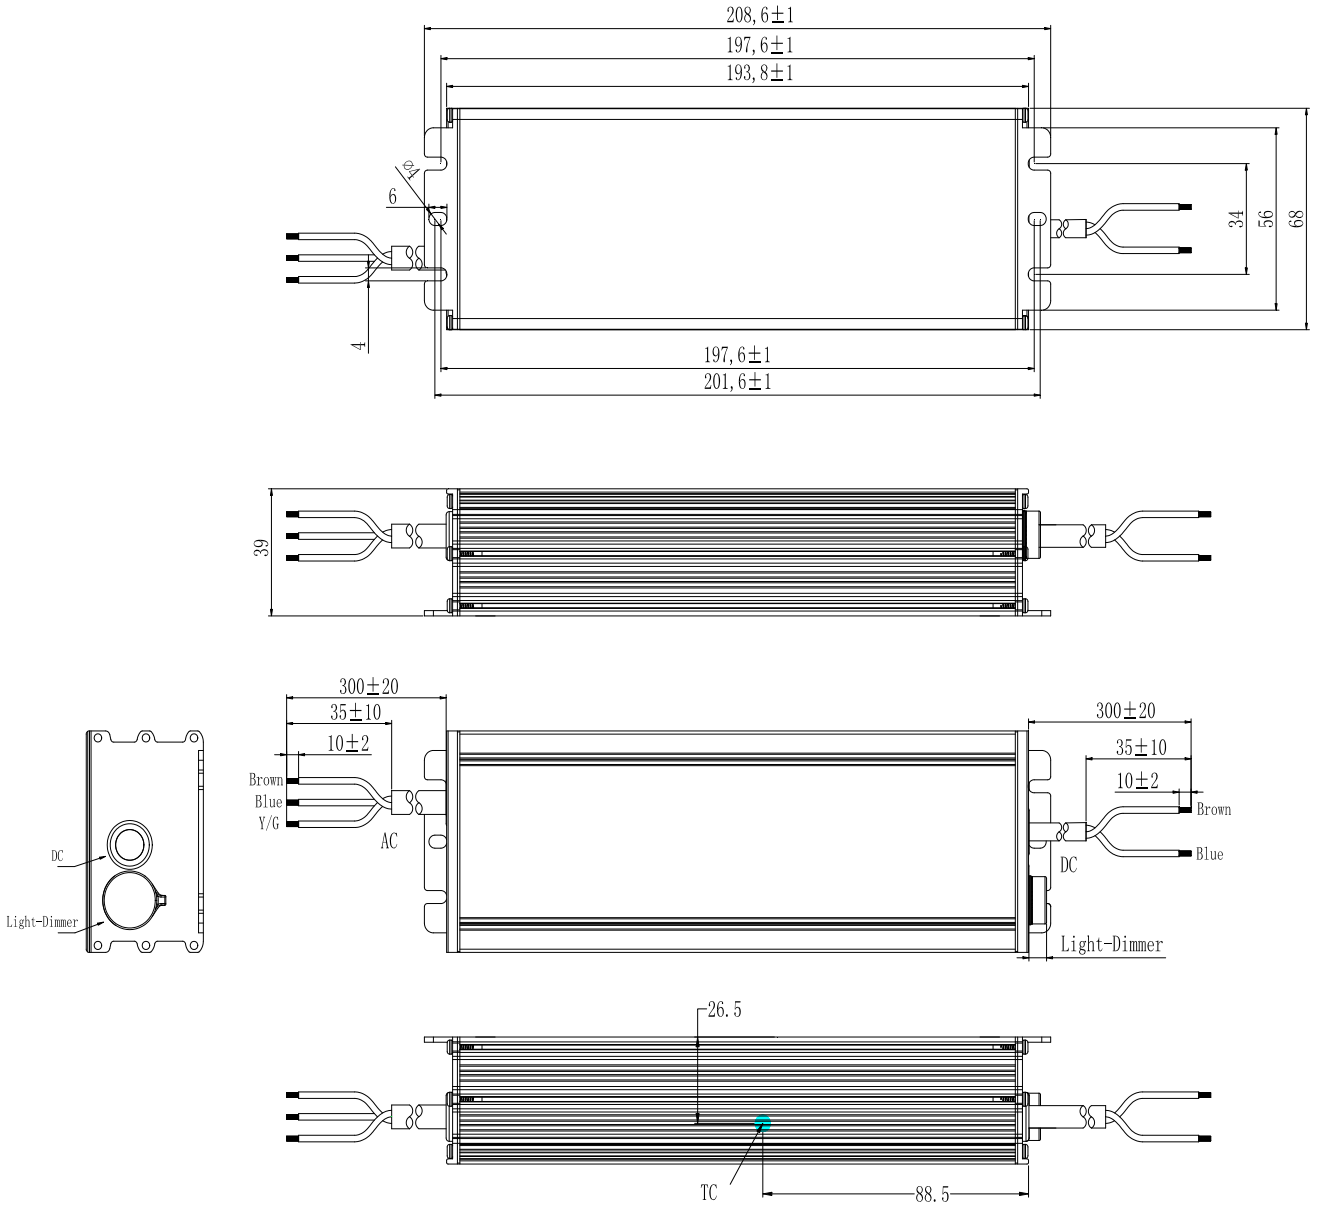













Wire	Specification	Note
Input	SJOW 17AWG 3*1.0mm <sup>2</sup> external diameter: 8.3mm L=300±20mm	CCC/CE/UL
Output	SJOW 17AWG 2*1.0mm <sup>2</sup> external diameter: 7.7mm L=300±20mm	CCC/CE/UL
Dimming	UL2733 22AWG*2C external diameter: 5.45mm L=350±20mm	Y = M

### LABEL













183.00 mm

45.50 mm

<b>INPUT</b> L (BROWN 棕) G (Y/G 黄/绿)  N (BLUE 蓝)	<b>MOSO<sup>®</sup> X6-240M086</b> LED DRIVER LED 控制装置(恒流型)		   	<b>OUTPUT</b> (BROWN 棕) Vo + (BLUE 蓝) Vo - (PURPLE 紫) DIM + (GRAY 灰) DIM -					
	<table border="1"> <tr> <td>INPUT (输入)</td> <td>100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)</td> </tr> <tr> <td>OUTPUT (输出)</td> <td>43-86V--- 0.42-4.2A Max.(最大电压): 110V--- Max.Power(最大功率):240W</td> </tr> <tr> <td>t<sub>c</sub>: 90°C</td> <td>t<sub>a</sub>: 50°C Input:100-200V~ t<sub>a</sub>: 60°C Input:200-240V~,277V~</td> </tr> </table>	INPUT (输入)	100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)	OUTPUT (输出)	43-86V--- 0.42-4.2A Max.(最大电压): 110V--- Max.Power(最大功率):240W	t <sub>c</sub> : 90°C	t <sub>a</sub> : 50°C Input:100-200V~ t <sub>a</sub> : 60°C Input:200-240V~,277V~	   	  
	INPUT (输入)	100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)							
OUTPUT (输出)	43-86V--- 0.42-4.2A Max.(最大电压): 110V--- Max.Power(最大功率):240W								
t <sub>c</sub> : 90°C	t <sub>a</sub> : 50°C Input:100-200V~ t <sub>a</sub> : 60°C Input:200-240V~,277V~								
MADE IN CHINA For LED module only		Suitable for Dry, Damp and Wet locations SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA							

183.00 mm

45.50 mm

<b>INPUT</b> L (BROWN 棕) G (Y/G 黄/绿)  N (BLUE 蓝)	<b>MOSO<sup>®</sup> X6-240V086</b> LED DRIVER LED 控制装置(恒流型)		   	<b>OUTPUT</b> (BROWN 棕) Vo + (BLUE 蓝) Vo - Io ADJ (+)					
	<table border="1"> <tr> <td>INPUT (输入)</td> <td>100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)</td> </tr> <tr> <td>OUTPUT (输出)</td> <td>43-86V--- 2.1-4.2A Max.(最大电压): 110V--- Max.Power(最大功率):240W</td> </tr> <tr> <td>t<sub>c</sub>: 90°C</td> <td>t<sub>a</sub>: 50°C Input:100-200V~ t<sub>a</sub>: 60°C Input:200-240V~,277V~</td> </tr> </table>	INPUT (输入)	100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)	OUTPUT (输出)	43-86V--- 2.1-4.2A Max.(最大电压): 110V--- Max.Power(最大功率):240W	t <sub>c</sub> : 90°C	t <sub>a</sub> : 50°C Input:100-200V~ t <sub>a</sub> : 60°C Input:200-240V~,277V~	   	  
	INPUT (输入)	100-240V~50/60Hz, 3.3A Max. PF:0.95 277V~ 50/60Hz, 1.0A Max (277V~ for North America only)							
OUTPUT (输出)	43-86V--- 2.1-4.2A Max.(最大电压): 110V--- Max.Power(最大功率):240W								
t <sub>c</sub> : 90°C	t <sub>a</sub> : 50°C Input:100-200V~ t <sub>a</sub> : 60°C Input:200-240V~,277V~								
MADE IN CHINA For LED module only		Suitable for Dry, Damp and Wet locations SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA							



## Specification for Approval

Product Name: 240W Outdoor Off-line Programmable Driver  
Product Model: X6-240M086   
X6-240V086   
Rev. A.1  
Sample Date:

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

XiLi Songbai Road 1061, Nanshan  
Address: District, Shenzhen City, Guangdong Province, P.R.China Post Code: 518108  
TEL: 0755-27657000 FAX: 0755-27657908  
E-mail: info@mosopower.com Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

