

Xitanium Constant Current Xtreme

Xitanium 150W .35/41/53 1-10V 230V sXt

Xitanium Xtreme LED drivers provide constant current output, optimal for a single string of LEDs. With exceptional operating efficiency, our drivers significantly reduce energy costs. The Xitanium Xtreme portfolio offers both central and standalone dimming protocols further increasing the energy savings and CO2 reductions achieved with LED lighting. The fully programmable drivers deliver all dimming options and a range of currents in a single driver. System reliability is maximized with intelligent temperature monitoring of the LED light engine. The full portfolio offers maximum flexibility with customizable operating settings, delivering optimal performance tailored for each design.

Product data

• General Information

Number Of Products On MCB (16A Type B) (Max)	7
--	---

• Operating and Electrical

Input Frequency	50 to 60 Hz
Total Harmonic Distortion IEC (Max)	20 %
Output Current	30 %
Ripple (Nom)	
Maximum Efficiency	92 %
Power Factor 100%	0.99
Load (Min)	
Output Current (Nom)	350/410/530 mA
Output Current Tolerance (Max)	5 %
Output Current Tolerance (Min)	-5 %
Input Voltage (AC)	220-240 V
Power Factor 50%	0.97
Load (Min)	
Earth Leakage Current (Max)	0.7 mA
Input Current (Max)	690 mA
Input Power (Nom)	165 W
Inrush Current Peak (Max)	130 A
Output Power (Nom)	42-150 W
Output Voltage	115-280 V

Inrush Current Width To 50% Of Peak	140 μ s
-------------------------------------	-------------

• Wiring

Control Wire Length	500 mm
Output Wire Length	500 mm
Control Wire Cross Section (Nom)	0.82 mm ²
Output Wire Cross Section (Nom)	0.82 mm ²

• Temperature

T-Ambient (Max)	55 °C
T-Ambient (Min)	-40 °C
T-Case Lifetime (Nom)	67 °C
T-Case Maximum (Max)	80 °C
Module Temperature Protection	Programmable
T-Case Switch Off (Nom)	94 °C

• Controls and Dimming

Control Interface	1-10V
Dimming Range	100-10 %
Lumistep Dimming	-
Time	
Lumistep Dimming	-
Time After Midpoint	

PHILIPS

RoHS compliance

• Mechanical and Housing

Housing Color Black


• Approval and Application

Surge Protection 3/3 kV
 (Common/Differential)
 IP Classification IP 66 [Ingress Protection 66]
 Isolation Classification Class II
 Approval Marks ENEC certificate
 CE marking

• Product Data

Full product code 872790092493000
 Order product name Xtanium 150W .35/.41/.53 1-10V 230V sXt
 EAN/UPC - Product 8718291999591
 Order code 913701215302
 Numerator - Quantity Per Pack 1
 Numerator - Packs per outer box 10
 Material Nr. (12NC) 913701215302
 Net Weight (Piece) 1.257 kg


Dimensional drawing

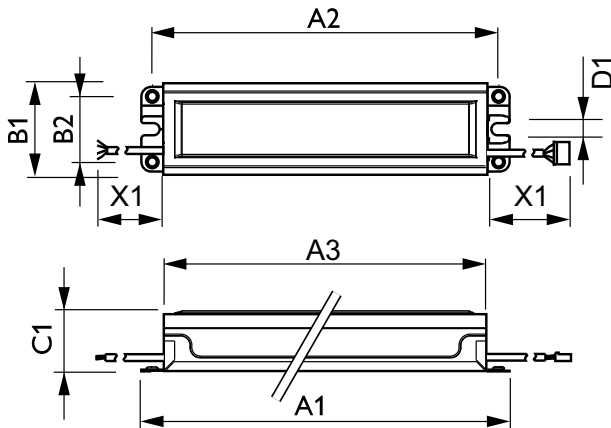

Xtanium 75 & 150 W sXt

Xtanium 150W .35/.41/.53 1-10V 230V sXt

Product	D1	A2	B2	C1	A1	A3	X1	B1
Xtanium 150W .35/.41/.53 1-10V 230V sXt	8 mm	226.2 mm	42.9 mm	37.1 mm	240.5 mm	211.1 mm	500 mm	59.1 mm



Xtanium 75 & 150W .35/.41/.53A 1-10V sXt



© 2016 Philips Lighting Holding B.V.
 All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, April 5
 data subject to change