



Model	Input Current Type	Input Voltage Range	Rated Output Power	Rated Output Current	Rated Output Voltage	Typical Efficiency	Certification
XV350W24	≤2A	220-240VAC	350W	0-14.58A	24V	92%	CE
XV350W36	≤2A	220-240VAC	350W	0-9.72A	36V	92%	CE
XV350W48	≤2A	220-240VAC	350W	0-7.3A	48V	93%	CE

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Voltage
	IP Grade	IP67
	Insulation Class	Class I
	Installation	Independent
Input	Rated Input Voltage	220-240Vac
	Operating Input Voltage	176-264Vac
	Input Frequency	Rated 50/60Hz
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤10% 230VAC,50-60Hz,100% loading
	Input Current	≤2A (230VAC, full load)
	Leakage Current	0.7mAmax @240Vac 50Hz, IEC61347-1
	Input Under/Over Voltage	No damage of wrong mains voltage: 0V AC to 340V AC, 10minutes maximum
	Standby Power	<0.5W
Lightning Surge	6KV line-line; 10KV line-earth	
Output	Ripple Current(< 120 Hz)	±5%
	PstLM	≤1
	SVM	≤0.4
	Current Accuracy	±5%
	Line Regulation	±5%
	Load Regulation	±5%
	Overshoot	Constant current type <110%lo
	Start-up Time	≤0.5S @230Vac
	Hold up Time	10mS typical @ 230VAC

	Efficiency	≥ 90%, 91% typical @230Vac, refer to Efficiency vs. Load curve
Protection	Short Circuit	Auto recovery
	Over Current	Auto recovery
	Over Voltage	Auto recovery
	Over Temperature	Auto recovery
Environment	Operating Ambient Temperature	-40°C~+60°C, 10%RH~100%RH, Rated Load
	Storage Temperature	-40°C~+80°C; 5%RH~100%RH
	Operating Case Temperature for Safety	-40°C~+60°C; 5%RH~100%RH
	Operating Case Temperature for Warranty	-40°C~+80°C; Case temperature for 5 years warranty. Humidity: 10% RH to 100% RH.
Standards	Certification	CE
	Safety Standards	GB19510.1/IEC61347-1 GB19510.14/61347-2-13
	EMC Standards	GB17625 GB17743 EN55015 EN61000-3-2 Class C EN61000-3-3
Others	MTBF	250 Khours, 10% failure rate,MIL-HDBK-217F
	Lifetime	50,000 hours, <70°C
	Dimensions	250*90*45(L*W*H)
	Net Weight	1785g/PC
	Wiring	Input VDE: H05RN-F/3X1.0mm,Brown/Blue/(Yellow/Green) Output VDE: H05RN-F/2X1.0mm,Brown/Blue,
Notes: Unless specified, all the test results are measured in 25°C room temperature. * marked items are optional and contact with sales people to get the functions.		

2. Connected quantities of different current Breaker

TYPE	Connected quantities of different current Breaker					Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²		
TYPE B		14	18	22	27	34	@230VAC	44
TYPE C		22	28	35	44	55		
TYPE D		35	45	56	70	87		

3. Label

INPUT

ACL BN

ACN BU

--- GN/YR

MADE IN CHINA
www.kg-power.com
S/N:

KGP LED Driver
KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

MODEL: XV350W24

INPUT: 220-240V~Max 2A 50/60Hz PF:0.95

OUTPUT: 24V 0-14.58A

Suitable for Dry, Damp and Wet Locations.

For LED Module only

CE SELV IP67

OUTPUT

Vo+ --- BN

Vo- --- BU

INPUT

ACL BN

ACN BU

--- GN/YR

MADE IN CHINA
www.kg-power.com
S/N:

KGP LED Driver
KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

MODEL: XV350W36

INPUT: 220-240V~Max 2A 50/60Hz PF:0.95

OUTPUT: 36V 0-9.72A

Suitable for Dry, Damp and Wet Locations.

For LED Module only

CE SELV IP67

OUTPUT

Vo+ --- BN

Vo- --- BU

INPUT

ACL BN

ACN BU

--- GN/YR

MADE IN CHINA
www.kg-power.com
S/N:

KGP LED Driver
KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

MODEL: XV350W48

INPUT: 220-240V~Max 2A 50/60Hz PF:0.95

OUTPUT: 48V 7.29A

Suitable for Dry, Damp and Wet Locations.

For LED Module only

CE SELV IP67

OUTPUT


Vo+ --- BN

Vo- --- BU


KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid



KGP-V1.2

4. Lifetime vs. Case Temperature

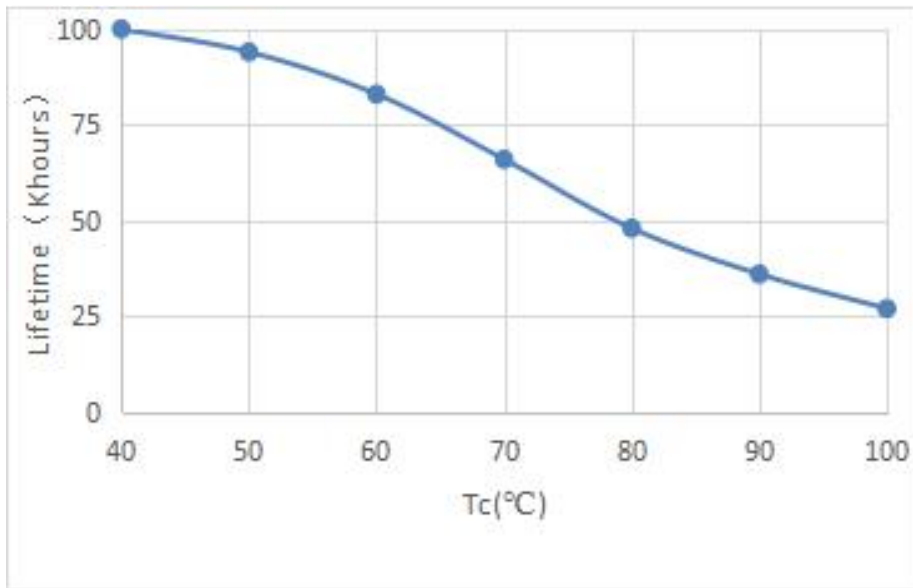

5. Power Factor, THD and Efficiency vs. Load

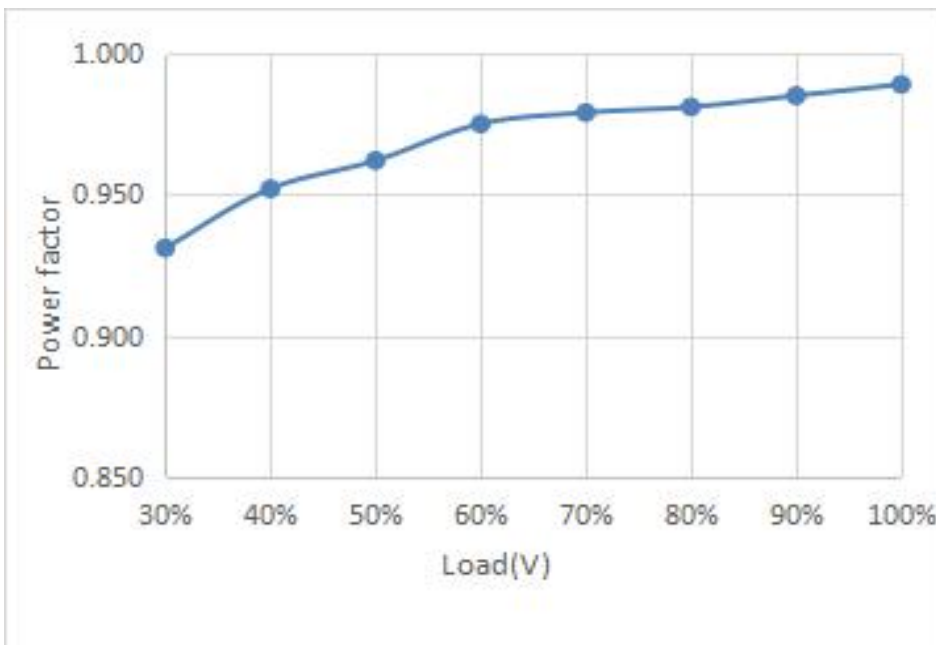

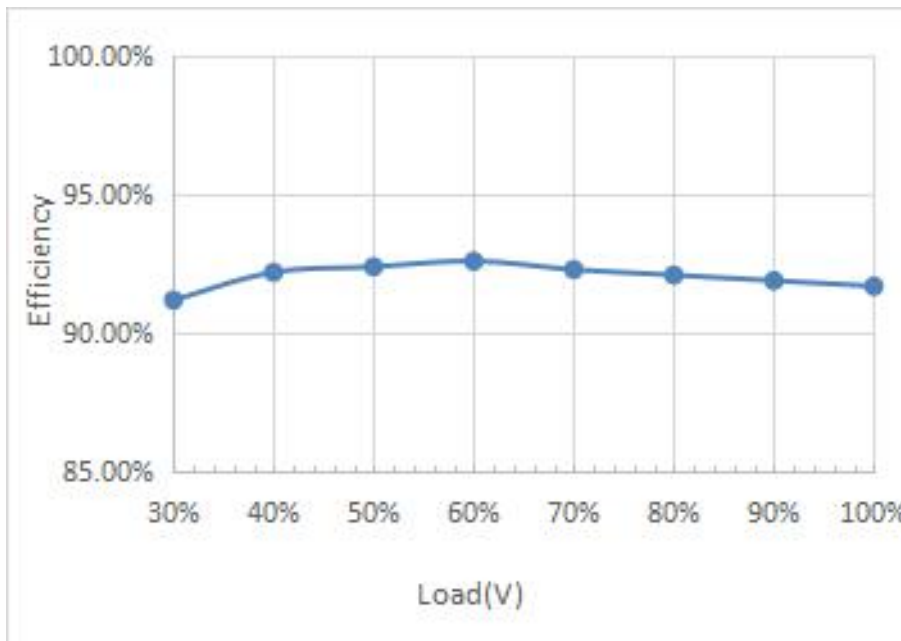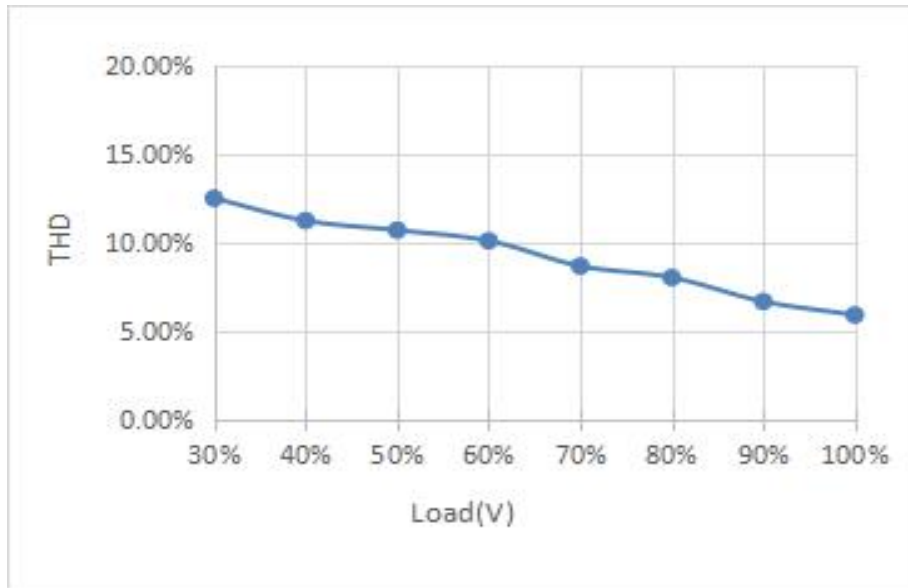

6. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
310*220*210	8Pcs	1.785	14.28	14.8

