

Constant Voltage Driver

Model: XV60W12
XV60W24
XV60W36



CE SELV IP67   

Model	Input Current Type	Input Voltage Range	Rated Output Power	Rated Output Current	Rated Output Voltage	Typical Efficiency	Certification
XV60W12	≤0.35A	220-240VAC	60W	0-5A	12V	85%	CE
XV60W24	≤0.35A	220-240VAC	60W	0-2.5A	24V	87%	CE
XV60W36	≤0.35A	220-240VAC	60W	0-1.67A	36V	87%	CE

1. Parameters



Category	Item	Technical Norm
Features	Output Type	Constant Voltage
	IP Grade	IP67
	Insulation Class	Class I
	Installation	Independent
Input	Rated Input Voltage	220-240Vac
	Operating Input Voltage	176-264Vac
	Input Frequency	Rated 50/60Hz
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤10% 230Vac/50Hz, 100% loading
	Input Current	≤0.2A (230VAC, full load)
	Leakage Current	0.7mAmax @240Vac 50Hz, IEC61347-1
	Input Under/Over Voltage	No damage of wrong mains voltage: 0V AC to 340V AC, 10minutes maximum
	Standby Power	<0.5W
	Lightning Surge	4KV line-line; 4KV line-earth
Output	Ripple Current(< 120 Hz)	±5%
	PstLM	> 1
	SVM	> 1
	Current Accuracy	±5%
	Line Regulation	±5%
	Load Regulation	±5%
	Overshoot	Constant current type <110%Io
	Start-up Time	≤0.5S @230Vac
	Hold up Time	10mS typical @ 230VAC




	Efficiency	≥ 85%, 85% typical @230Vac, refer to Efficiency vs. Load curve
Protection	Short Circuit	Auto recovery
	Over Current	Auto recovery
	Over Voltage	Auto recovery
	Over Temperature	Auto recovery
Environment	Operating Ambient Temperature	-40°C~+60°C, 10%RH~100%RH, Rated Load
	Storage Temperature	-40°C~+80°C; 5%RH~100%RH
	Operating Case Temperature for Safety	-40°C~+60°C; 5%RH~100%RH
	Operating Case Temperature for Warranty	-40°C~+80°C; Case temperature for 5 years warranty. Humidity: 10% RH to 100% RH.
Standards	Certification	CE
	Safety Standards	GB19510.1/IEC61347-1 GB19510.14/61347-2-13
	EMC Standards	GB17625 GB177*3 EN55015 EN61000-3-2 Class C EN61000-3-3
Others	MTBF	250 Khours, 10% failure rate,MIL-HDBK-217F
	Lifetime	50,000 hours, <70°C
	Dimensions	115X53X31.5mm(L*W*H)
	Net Weight	407g/PC
	Wiring	Input VDE: H05RN-F/3X1.0mm,Brown/Blue/(Yellow/Green) Output VDE: H05RN-F/2X1.0mm,Brown/Blue,
Notes: Unless specified, all the test results are measured in 25°C room temperature. * marked items are optional and contact with sales people to get the functions.		



2. Connected quantities of different current Breaker

TYPE	Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B		14	18	22	27	34	@230VAC	44	288us
TYPE C		22	28	35	44	55			
TYPE D		35	45	56	70	87			


3. Label

<p>INPUT</p> <p><input type="radio"/> ACL BN</p> <p><input type="radio"/> ACN BU</p> <p><input type="radio"/> ---GN/YR</p> <p>MADE IN CHINA www.kg-power.com S/N:</p>	<p>KGP LED Driver</p> <p>KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid</p> <p>MODEL:XV60W12</p> <p>INPUT:220-240V~Max.0.35A 50/60Hz PF:0.95</p> <p>OUTPUT:12V --0-5A Max.60W</p> <p>Suitable for Dry, Damp and Wet Locations. ta:60°C Input:220-240V~</p> <p>For LED Module only</p> <p>CE SELV IP67</p>   	<p>OUTPUT</p> <p>Vo+ ---BN <input type="radio"/></p> <p>Vo- ---BU <input type="radio"/></p>
--	---	--



<p>INPUT</p> <p><input type="radio"/> ACL BN</p> <p><input type="radio"/> ACN BU</p> <p><input type="radio"/> ---GN/YR</p> <p>MADE IN CHINA www.kg-power.com S/N:</p>	<p>KGP LED Driver</p> <p>KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid</p> <p>MODEL:XV60W24</p> <p>INPUT:220-240V~Max.0.35A 50/60Hz PF:0.95</p> <p>OUTPUT:24V --0-2.5A Max.60W</p> <p>Suitable for Dry, Damp and Wet Locations. ta:60°C Input:220-240V~</p> <p>For LED Module only</p> <p>CE SELV IP67</p>   	<p>OUTPUT</p> <p>Vo+ ---BN <input type="radio"/></p> <p>Vo- ---BU <input type="radio"/></p>
--	--	--


<p>INPUT</p> <p><input type="radio"/> ACL BN</p> <p><input type="radio"/> ACN BU</p> <p><input type="radio"/> ---GN/YR</p> <p>MADE IN CHINA www.kg-power.com S/N:</p>	<p>KGP LED Driver</p> <p>KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid</p> <p>MODEL:XV60W36</p> <p>INPUT:220-240V~Max.0.35A 50/60Hz PF:0.95</p> <p>OUTPUT:36V --0-1.67A Max.60W</p> <p>Suitable for Dry, Damp and Wet Locations. ta:60°C Input:220-240V~</p> <p>For LED Module only</p> <p>CE SELV IP67</p>   	<p>OUTPUT</p> <p>Vo+ ---BN <input type="radio"/></p> <p>Vo- ---BU <input type="radio"/></p>
--	--	--

4. Lifetime vs. Case Temperature

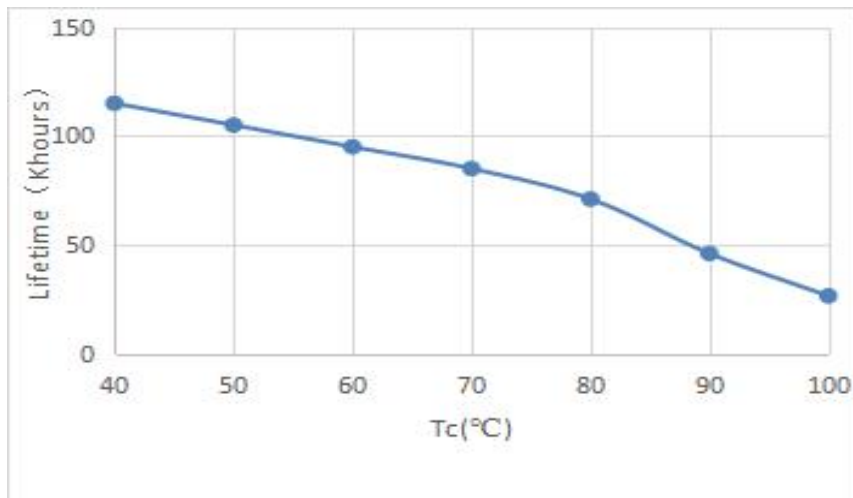

5. Power Factor, THD and Efficiency vs. Load

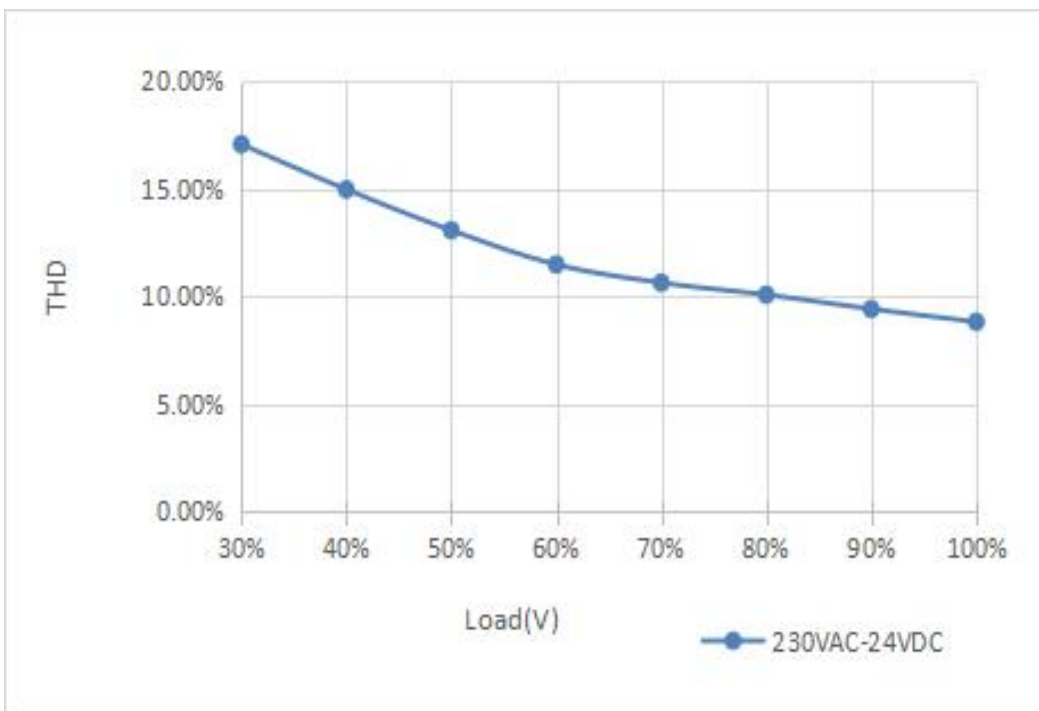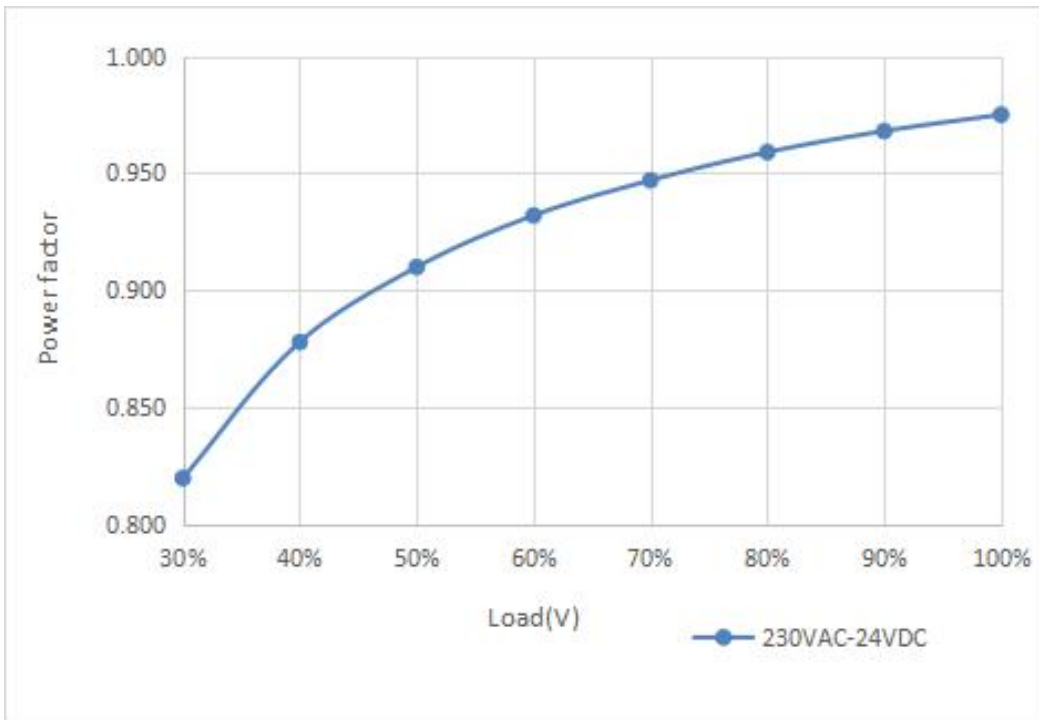

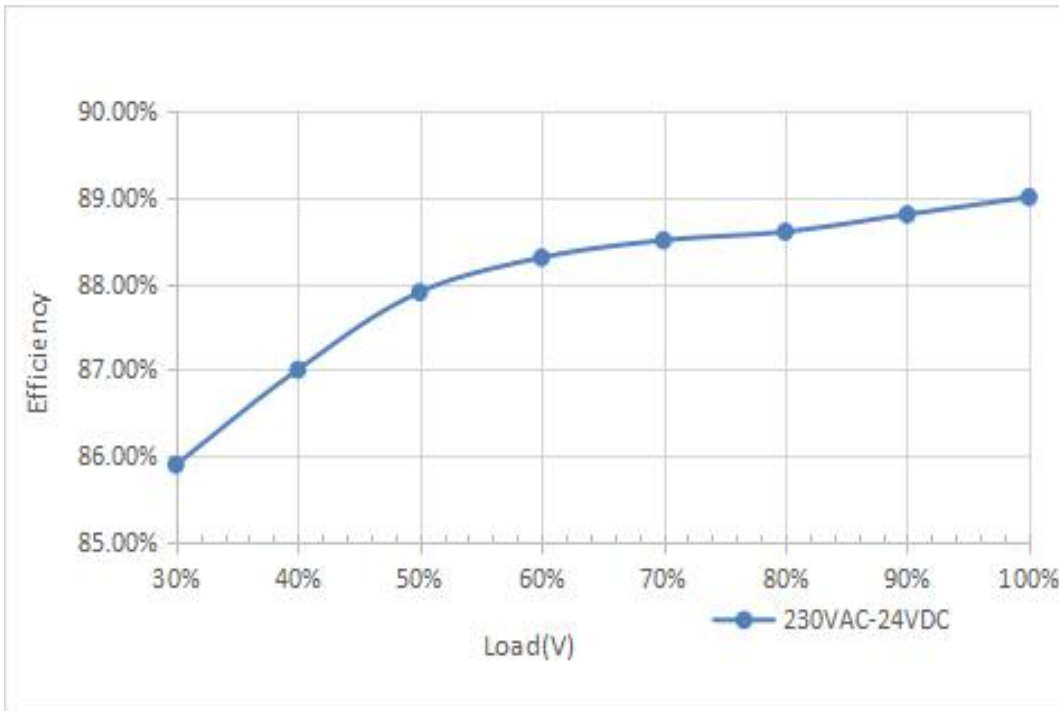


6. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
447*240*200	36Pcs	0.407	14.6	15.1

7. Mechanical Design

- VDE Cable

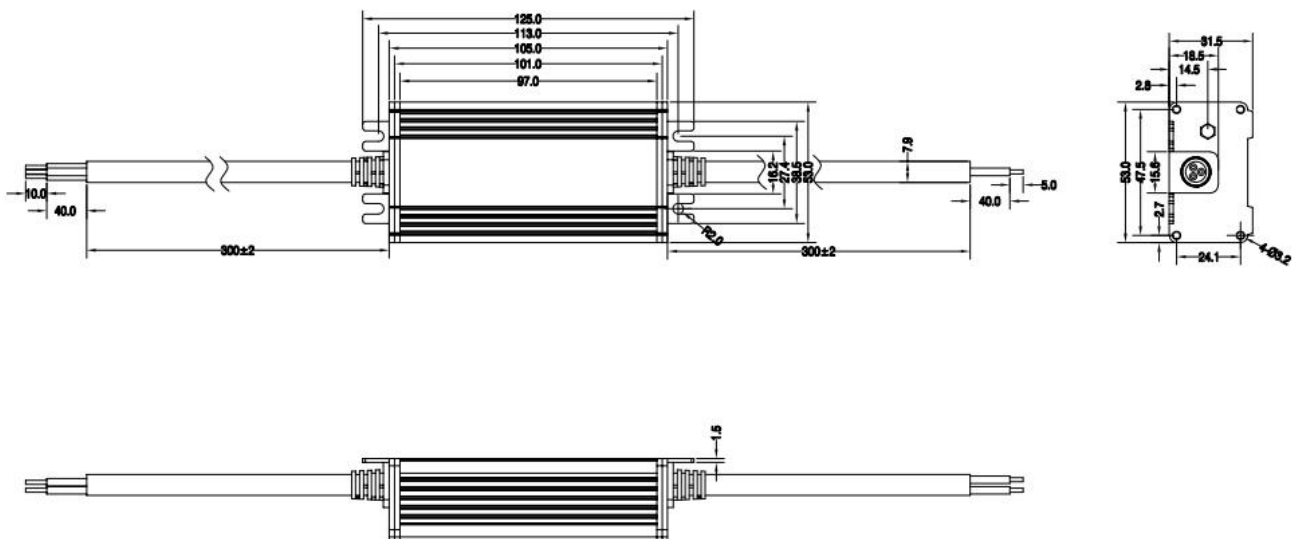

8. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)